

2μA, 600mA Low Dropout Voltage Linear Regulator

General Description

The JC2306 series are a group of low-dropout (LDO) voltage regulators offering the benefits of wide input voltage range from 1.2V to 5.5V, low dropout voltage, low power consumption, and miniaturized packaging. Quiescent current of only 2μA makes these devices ideal for powering the battery-powered, always-on systems that require very little idle-state power dissipation to a longer service life. There is an option of shutdown mode by selecting the parts with the EN pin and pulling it low. The shutdown current in this mode goes down to only 10nA (typical).

The JC2306 series of linear regulators are stable with the ceramic output capacitor over its wide input range from 1.2V to 5.5V and the entire range of output load current (0mA to 600mA).


Features

- 2μA Ground Current at no Load
- ±2% Output Accuracy
- 600mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.32V at 600mA/ VOUT 3.3V
- Support Fixed Output Voltage 0.8V, 0.9V, 1.2V, 1.5V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Adjustable Output Voltage Available by Specific Application
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
- Over-Temperature Protection
- SOT-23-3, SOT-23-5 and DFN-4L 1x1 Packages Available

Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment
- Car Navigation Systems

Pin Configurations

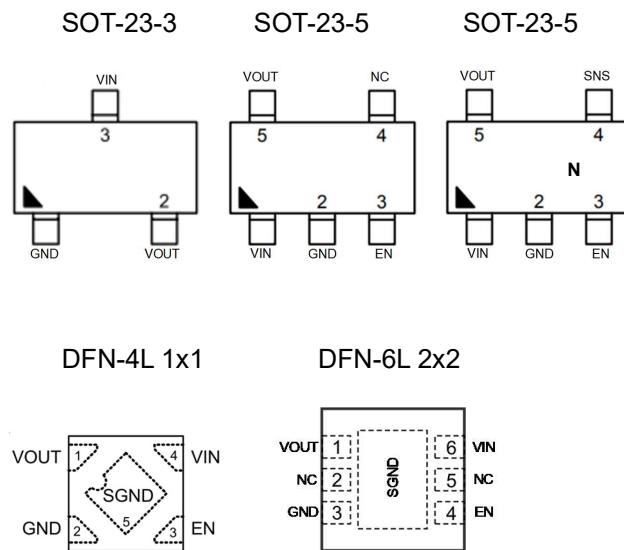

2 μ A, 600mA Low Dropout Voltage Linear Regulator

Ordering Information

JC2306-AABB

Designator	Description	Symbol	Description
AA	Output Voltage	08	$V_{OUT} = 0.8V$
	
	
	
		33	$V_{OUT} = 3.3V$
BB	Package type	S3	SOT-23-3
		S5	SOT-23-5
		D4	DFN-1X1-4L
		D6	DFN-2X2-6L

JC2306 N-AABB (For SOT-23-5 with **SNS** pin)

Designator	Description	Symbol	Description
AA	Output Voltage	08	$V_{OUT} = 0.8V$
	
	
	
		33	$V_{OUT} = 3.3V$
BB	Package type	S5	SOT-23-5

2μA, 600mA Low Dropout Voltage Linear Regulator**Description of Functional Pins**

JC2306

Pin No				Pin Name	Pin Function
SOT-23-3	SOT-23-5	DFN-1X1	DFN-2X2		
1	2	2	3	GND	Ground
2	5	1	1	VOUT	Output of the Regulator
3	1	4	6	VIN	Input of Supply Voltage.
	3	3	4	EN	Enable Control Input.
	4		2,5	NC	No internal connection
		Exposed Pad	Exposed Pad	SGND	Substrate of Chip. Leave floating or tie to GND.

JC2306 N (For SOT-23-5 with **SNS** pin)

Pin No	Pin Name	Pin Function	
SOT-23-5			
2	GND	Ground	
5	VOUT	Output of the Regulator	
1	VIN	Input of Supply Voltage.	
3	EN	Enable Control Input.	
4	SNS	Sense of Output Voltage.	

2 μ A, 600mA Low Dropout Voltage Linear Regulator

Typical Application Circuit

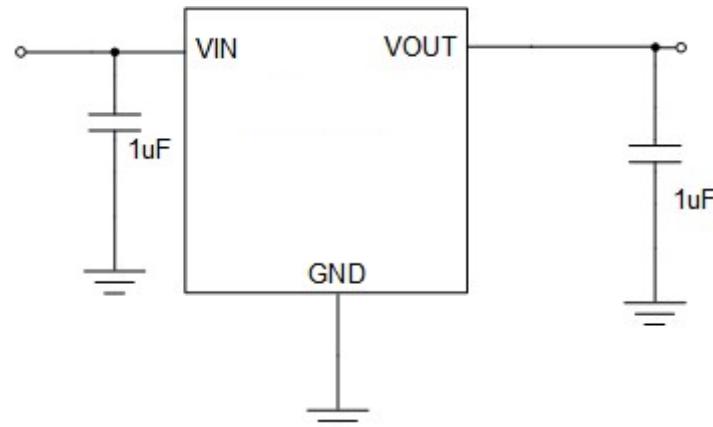


Figure 1: Application circuit of Fixed V_{OUT} LDO

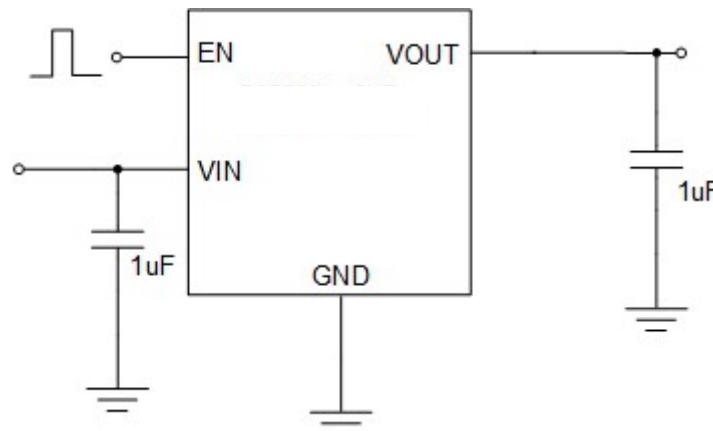


Figure 2: Application circuit of Fixed V_{OUT} LDO with enable function

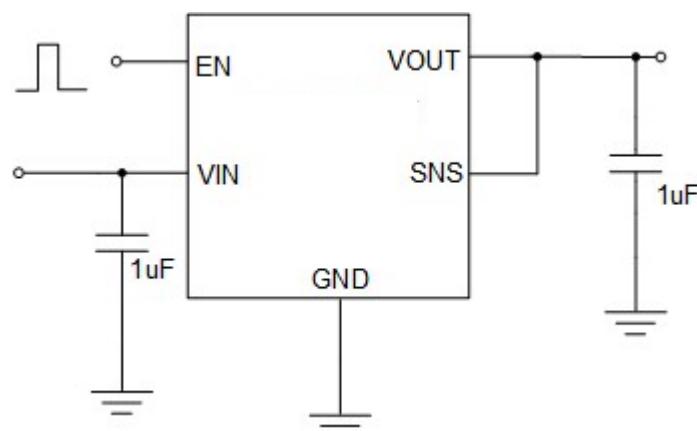


Figure 3: Application circuit of Fixed V_{OUT} LDO with enable and **sense** functions

2 μ A, 600mA Low Dropout Voltage Linear Regulator


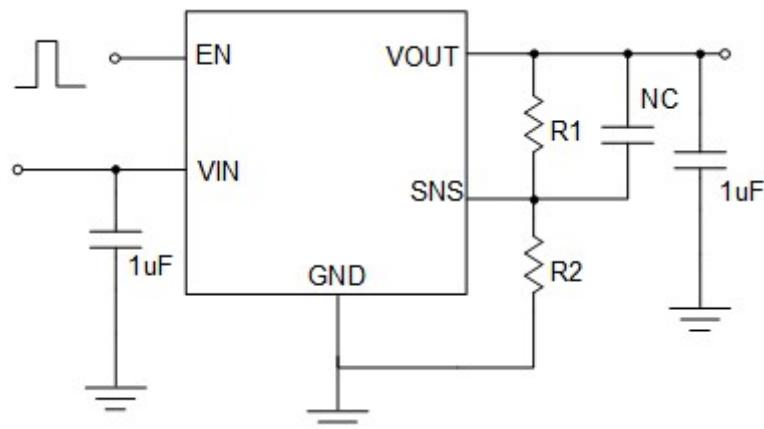


Figure 4: Adjustable output voltage LDO application circuit by JC2306N-08S5

Function Block Diagram

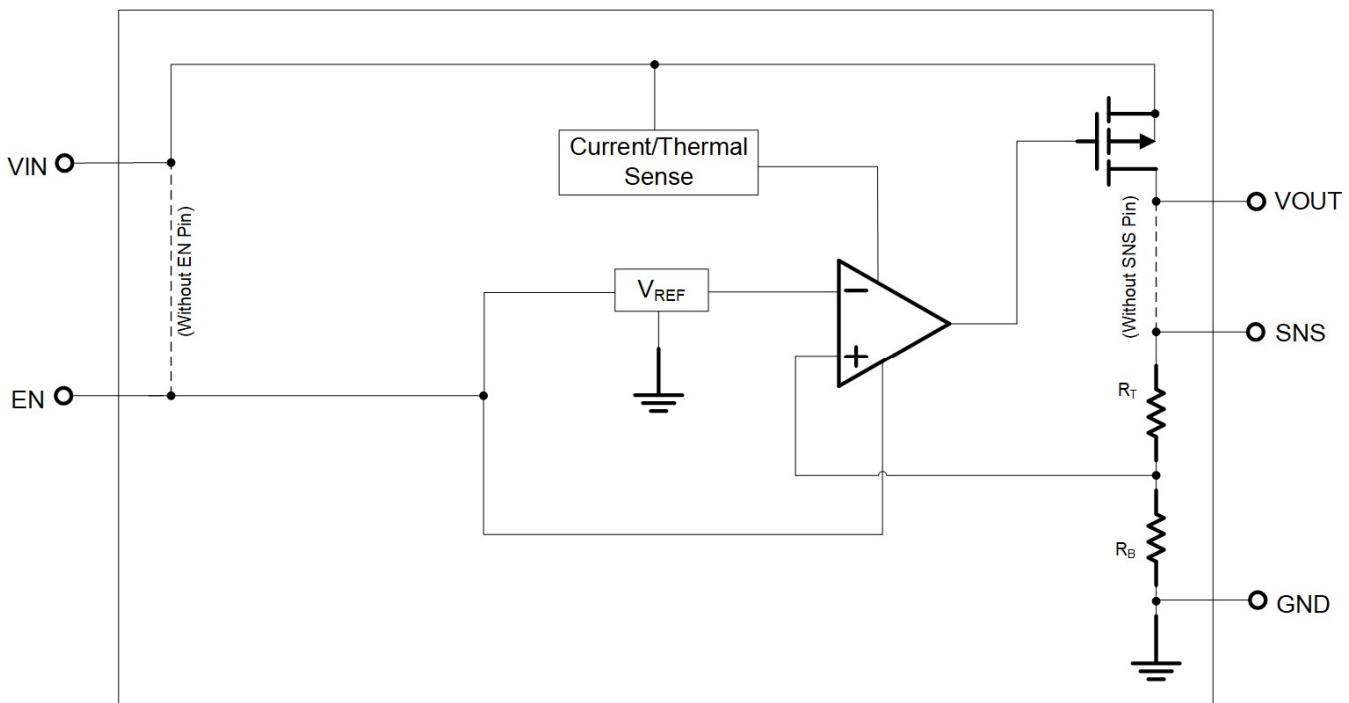

2 μ A, 600mA Low Dropout Voltage Linear Regulator

Absolute Maximum Ratings (Note 1)

VIN to GND -----	-0.3V to 6.5V
VOUT, EN, SNS to GND -----	-0.3V to 6V
VOUT to VIN -----	-6V to 0.3V

Package Thermal Resistance (Note 2)

SOT-23-5, SOT-23-3, θ_{JA} -----	200 °C /W
DFN-4L 1x1, θ_{JA} -----	130 °C /W
Lead Temperature (Soldering, 10 sec.) -----	260 °C
Junction Temperature -----	150 °C
Storage Temperature Range -----	-60 °C to 150 °C

ESD Susceptibility

HBM -----	2KV
MM -----	200V
CDM -----	2KV

Recommended Operating Conditions

Input Voltage VIN -----	1.2V to 5.5V
Junction Temperature Range -----	-40 °C to 125 °C
Ambient Temperature Range -----	-40 °C to 85 °C

2μA, 600mA Low Dropout Voltage Linear Regulator

Electrical Characteristics

($V_{IN} = 5V$, $V_{EN} = 5V$ $T_A = 25^\circ C$ unless otherwise specified)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Supply Voltage	V_{IN}			1.2	--	5.5	V
DC Output Voltage Accuracy		$I_{LOAD} = 0.1mA$		-2		2	%
Dropout Voltage ($I_{LOAD} = 600mA$) (Note 3)	V_{DROP_3V}	$V_{OUT} \geq 3V$		--	0.32		V
	$V_{DROP_2.8V}$	$V_{OUT} = 2.8V$			0.36		
	$V_{DROP_2.5V}$	$V_{OUT} = 2.5V$			0.36		
	$V_{DROP_1.8V}$	$V_{OUT} = 1.8V$			0.57		
	$V_{DROP_1.5V}$	$V_{OUT} = 1.5V$			0.71		
	$V_{DROP_1.2V}$	$V_{OUT} = 1.2V$			0.8		
	$V_{DROP_0.9V}$	$V_{OUT} = 0.8V$			1.05		
Ground Current	I_Q	$I_{LOAD} = 0mA$			2		μA
Shutdown Ground Current	I_{SD}	$V_{EN} = 0V$,			0.01	0.5	μA
V_{OUT} Shutdown Leakage Current	I_{LEAK}	$V_{OUT} = 0V$			0.01	0.5	
SNS Input Current	I_{SNS}	$SNS = V_{OUT}$			0.7		μA
Enable Threshold Voltage	V_{IH}	EN Rising				2	V
	V_{IL}	EN Falling		0.6			
EN Input Current	I_{EN}	$V_{EN} = 5V$			10	100	nA
Line Regulation	Δ_{LINE}	$I_{LOAD} = 30mA$, $1.5V \leq V_{IN} \leq 5.5V$ or $(V_{OUT} + 0.2V) \leq V_{IN} \leq 5.5V$			0.2		%
Load Regulation	Δ_{LOAD}	$10mA \leq I_{LOAD} \leq 0.6A$			0.5		%
Output Current Limit	I_{LIM}	$V_{OUT} = 0$		601	1100		mA
Power Supply Rejection Ratio ($I_{LOAD} = 50mA$)	PSRR	$V_{OUT} = 0.8V$, $V_{IN} = 3V$	$f = 1kHz$	--	76	--	dB
			$f = 10kHz$	--	57	--	
			$f = 100kHz$	--	44	--	
Output Voltage Noise (BW = 10Hz to 100kHz, $C_{OUT} = 1\mu F$,)		$V_{IN} = 4.3V$	$V_{OUT} = 0.8V$	--	22	--	μV_{RMS}
		$I_{LOAD} = 0.1A$	$V_{OUT} = 3.3V$	--	63	--	
Thermal Shutdown Temperature	T_{SD}	$I_{LOAD} = 10mA$		--	155	--	°C
Thermal Shutdown Hysteresis	ΔT_{SD}			--	15	--	°C

2 μ A, 600mA Low Dropout Voltage Linear Regulator







Note 1. Stresses beyond those listed “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.

Note 2. θ_{JA} is measured at $T_A = 25^\circ\text{C}$ on a DS-Tech EVB board.





Note 3. $V_{DROP} = V_{IN} - V_{OUT}$ when the V_{OUT} is 98% of its target value.

2 μ A, 600mA Low Dropout Voltage Linear Regulator


Typical Characteristics

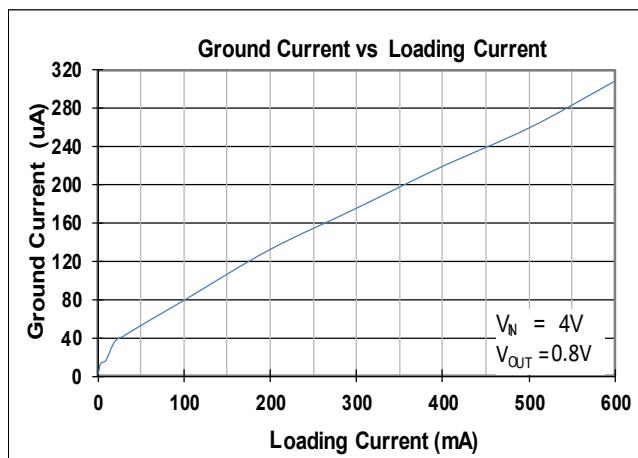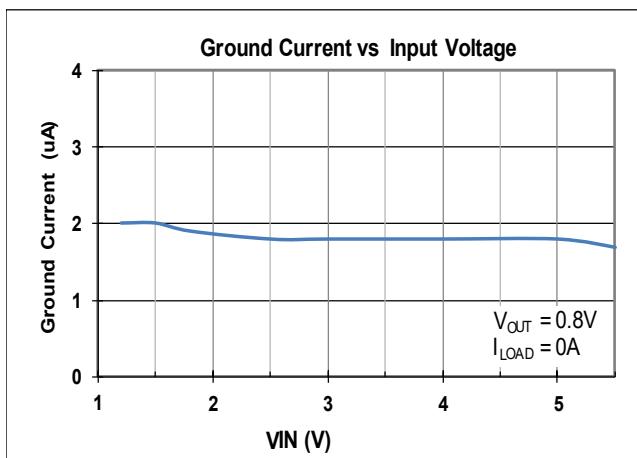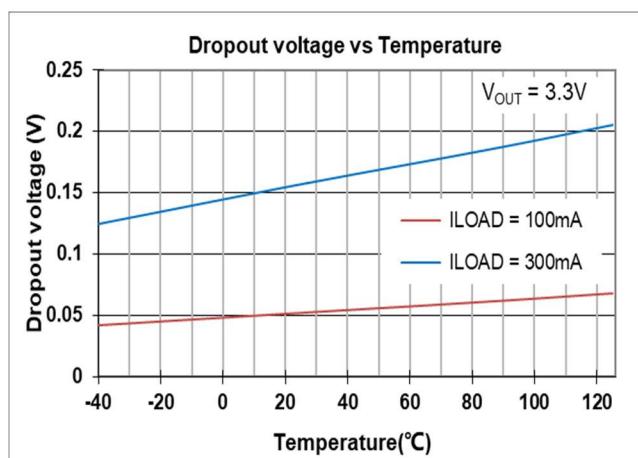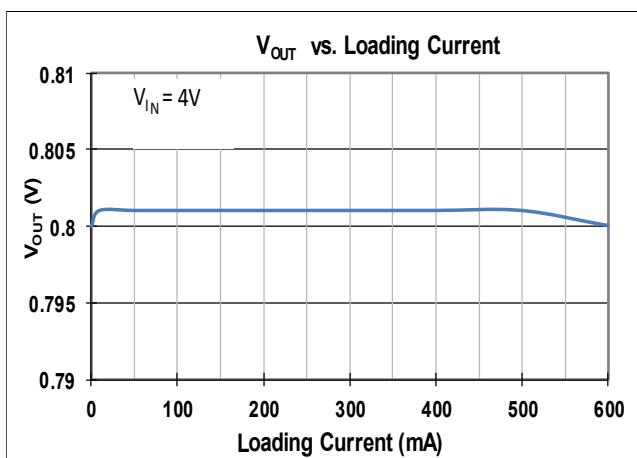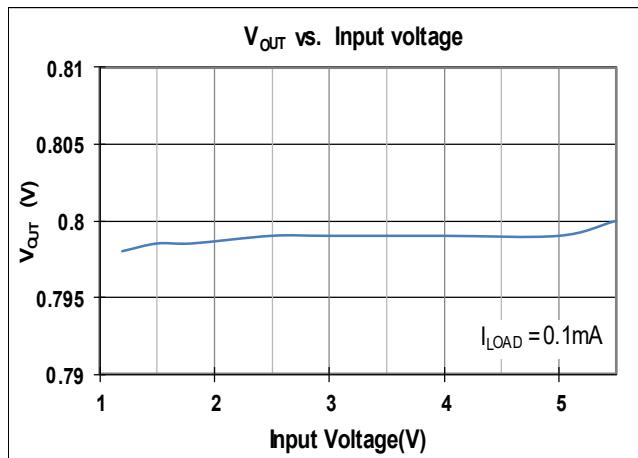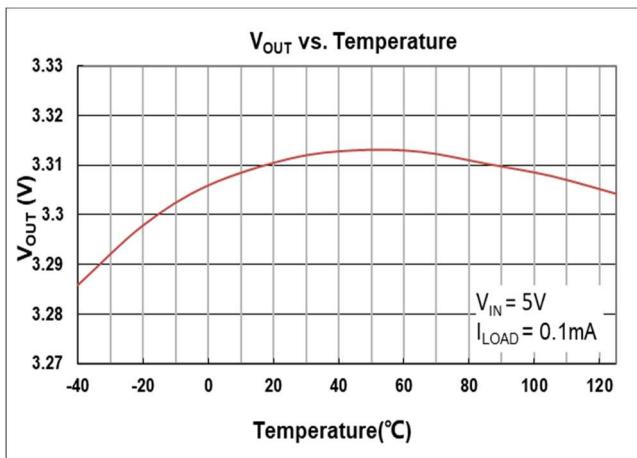


2 μ A, 600mA Low Dropout Voltage Linear Regulator

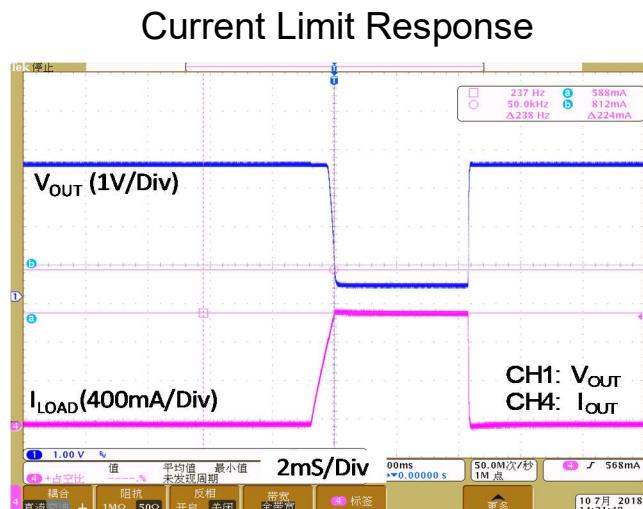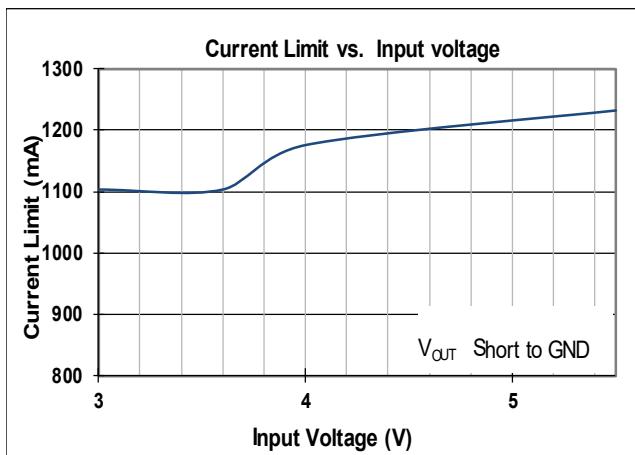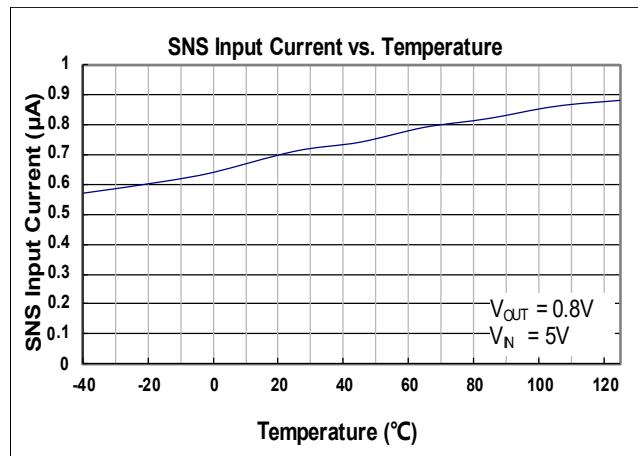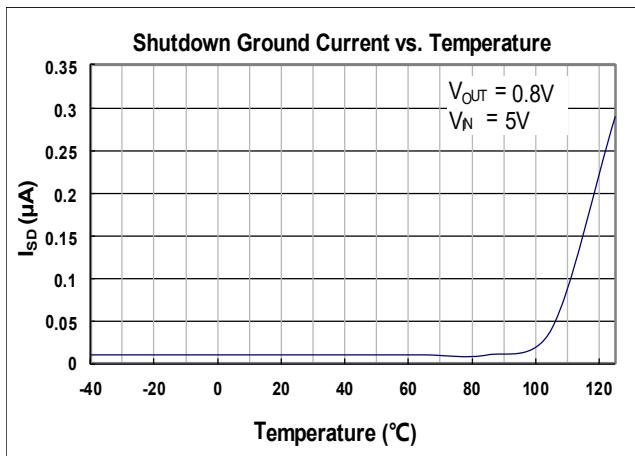

Load Transient Response I

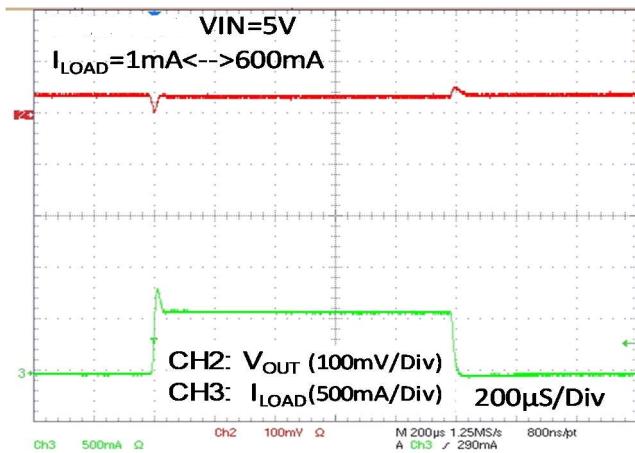


Load Transient Response II

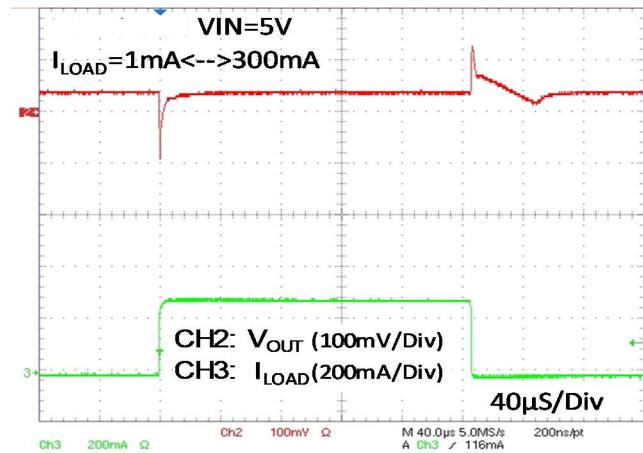


2µA, 600mA Low Dropout Voltage Linear Regulator


Line Transient Response

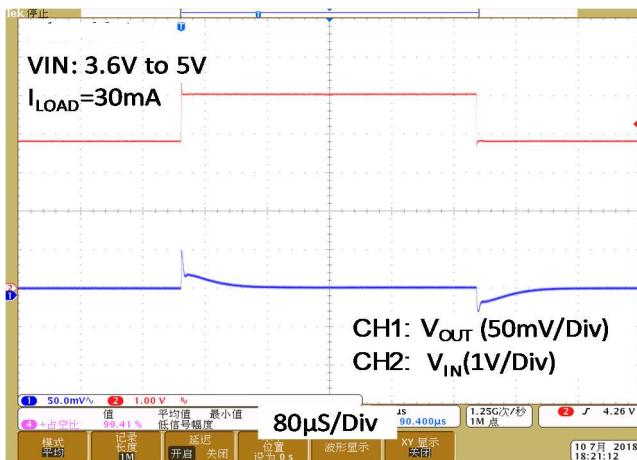


PSRR vs. Frequency

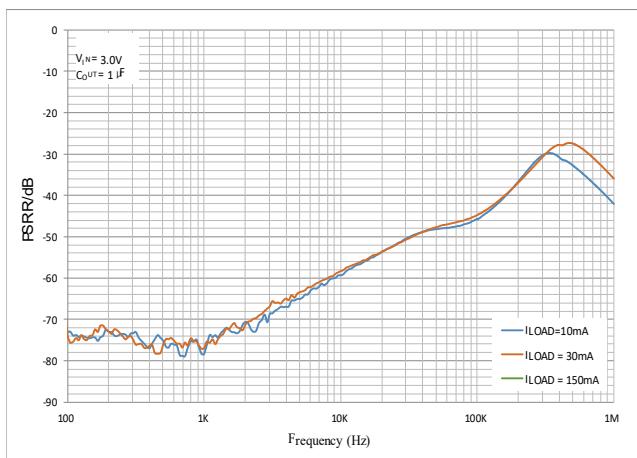

V_{OUT} Turn On/Off by EN

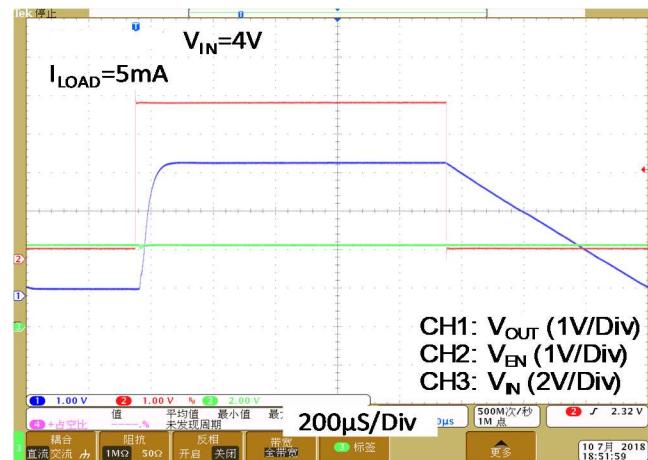

Noise Density Spectrum

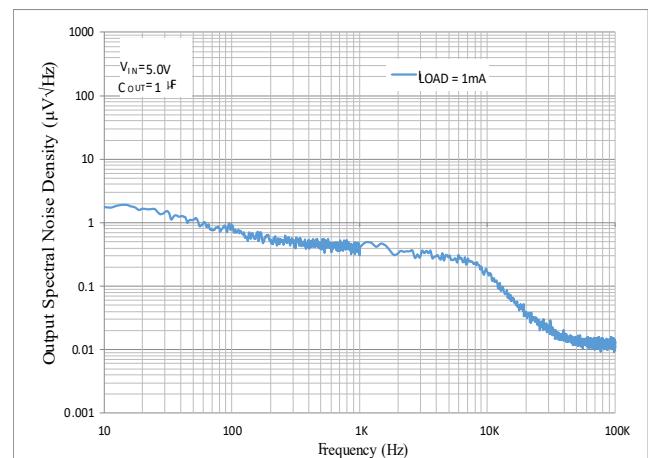

2μA, 600mA Low Dropout Voltage Linear Regulator

Application Guideline

Input and Output Capacitor Requirements

The external input and output capacitors of JC2306 series must be properly selected for stability and performance. Use a 1μF or larger input capacitor and place it close to the IC's VIN and GND pins. Any output capacitor meeting the minimum 1mΩ ESR (Equivalent Series Resistance) and effective capacitance between 1μF and 22μF requirement may be used. Place the output capacitor close to the IC's VOUT and GND pins. Increasing capacitance and decreasing ESR can improve the circuit's PSRR and line transient response.

Current Limit

The JC2306 series contain the current limiter of output power transistor, which monitors and controls the transistor, limiting the output current to 1100mA (typical). The output can be shorted to ground indefinitely without damaging the part.

Dropout Voltage

The JC2306 series use a PMOS pass transistor to achieve low dropout. When (VIN – VOUT) is less than the dropout voltage (V_{DROP}), the PMOS pass device is in the linear region of operation and the input-to-output resistance is the RDS(ON) of the PMOS pass element. V_{DROP} scales approximately with the output current because the PMOS device behaves as a resistor in dropout condition.

As any linear regulator, PSRR and transient response are degraded as (VIN – VOUT) approaches dropout condition.

Adjustable Output Voltage Application

The JC2306 N with SNS pin also can work as an adjustable output voltage LDO. Figure 4 gives the connections for the adjustable output voltage application. The resistor divider from VOUT to SNS sets the output voltage when in regulation.

The voltage on the SNS pin sets the output voltage and is determined by the values of R1 and R2. To keep a good temperature coefficient of output voltage, the values of R1 and R2 should be selected carefully to ignore the temperature effect of input current at the SNS pin. A current greater than 50μA in the resistor divider is recommended to meet the above requirement. The adjustable output voltage can be calculated using the formula given in equation 1:

$$V_{OUT} = \frac{R1+R2}{R2} \times V_{SNS} \quad (1)$$

where V_{SNS} is determined by the output voltage selections in the ordering information of JC2306N-XXS5. The maximum adjustable output voltage is 5V. Generally, to maximize the available adjustable output voltage range, JC2306N-08 is recommended (V_{SNS} is 0.8V in formula 1 now).

The minimum recommended 50μA in the resistor divider makes the application no longer a 2μA low quiescent LDO.

OTP (Over Temperature Protection)

The over temperature protection function of JC2306 series will turn off the P-MOSFET when the junction temperature exceeds 155°C (typ.). Once the junction temperature cools down by approximately 15°C, the regulator will automatically resume operation.

Thermal Application

2 μ A, 600mA Low Dropout Voltage Linear Regulator

For continuous operation, do not exceed the absolute maximum junction temperature. The maximum power dissipation depends on the thermal resistance of the IC package, PCB layout, rate of surrounding airflow, and difference between junction and ambient temperature. The maximum power dissipation can be calculated as below:

$T_A=25^\circ\text{C}$, DS-Tech PCB,

The max $\text{PD}(\text{Max}) = (125^\circ\text{C} - 25^\circ\text{C}) / (200^\circ\text{C/W}) = 0.5\text{W}$ for SOT-23-3/SOT-23-5 packages.


The max $\text{PD}(\text{Max}) = (125^\circ\text{C} - 25^\circ\text{C}) / (130^\circ\text{C/W}) = 0.77\text{W}$ for DFN-4L 1x1 package.

Power dissipation (PD) is equal to the product of the output current and the voltage drop across the output pass element, as shown in the equation below:

$$\text{PD} = (\text{VIN} - \text{VOUT}) \times \text{IOUT}$$


Layout Consideration

By placing input and output capacitors on the same side of the PCB as the LDO, and placing them as close as is practical to the package can achieve the best performance. The ground connections for input and output capacitors must be back to the JC2306 ground pin using as wide and as short of a copper trace as is practical. Connections using long trace lengths, narrow trace widths, and/or connections through via must be avoided. These add parasitic inductances and resistance that results in worse performance especially during transient conditions.

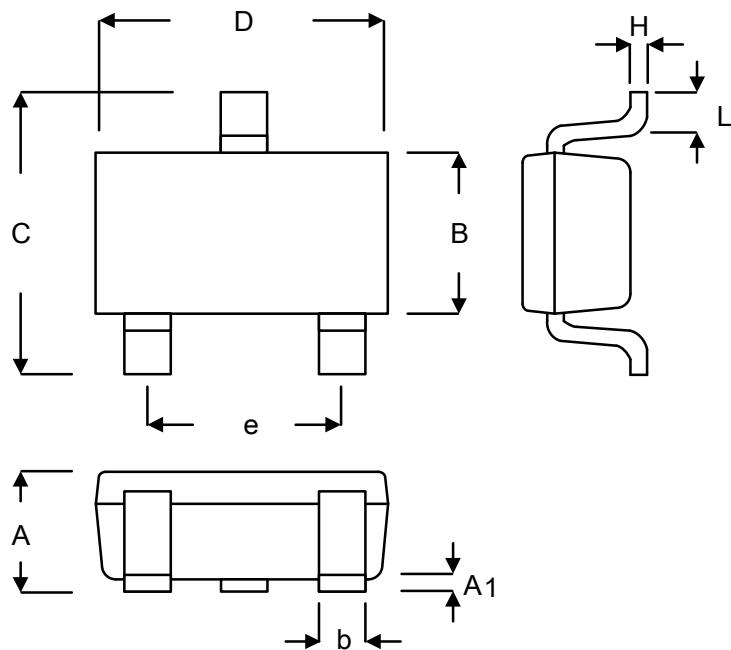2 μ A, 600mA Low Dropout Voltage Linear Regulator**Package Information:**

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.889	1.295	0.035	0.051
A1	0.000	0.152	0.000	0.006
B	1.397	1.803	0.055	0.071
b	0.250	0.560	0.010	0.022
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	1.803	2.007	0.071	0.079
H	0.080	0.254	0.003	0.010
L	0.300	0.610	0.012	0.024


SOT-23-3L

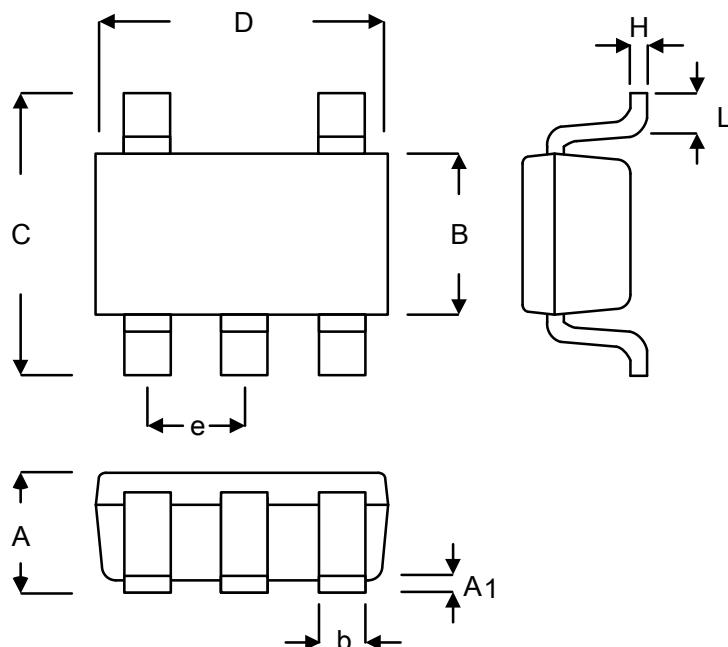2 μ A, 600mA Low Dropout Voltage Linear Regulator

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.889	1.295	0.035	0.051
A1	0.000	0.152	0.000	0.006
B	1.397	1.803	0.055	0.071
b	0.250	0.560	0.010	0.022
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	0.838	1.041	0.033	0.041
H	0.080	0.254	0.003	0.010
L	0.300	0.610	0.012	0.024

SOT-23-5L

2 μ A, 600mA Low Dropout Voltage Linear Regulator

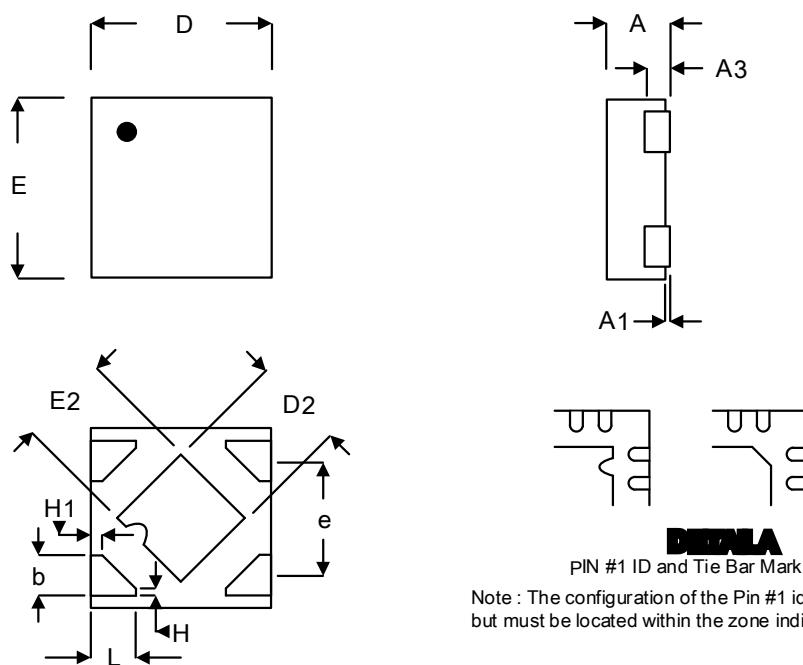


DFN-1X1-4L

Note : The configuration of the Pin #1 identifier is optional, but must be located within the zone indicated.

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.300	0.400	0.012	0.016
A1	0.000	0.050	0.000	0.002
A3	0.117	0.162	0.005	0.006
b	0.175	0.275	0.007	0.011
D	0.900	1.100	0.035	0.043
D2	0.450	0.550	0.018	0.022
E	0.900	1.100	0.035	0.043
E2	0.450	0.550	0.018	0.022
e	0.625		0.025	
L	0.200	0.300	0.008	0.012
H	0.039		0.002	
H1	0.064		0.003	

DFN-1X1-4L

2 μ A, 600mA Low Dropout Voltage Linear Regulator

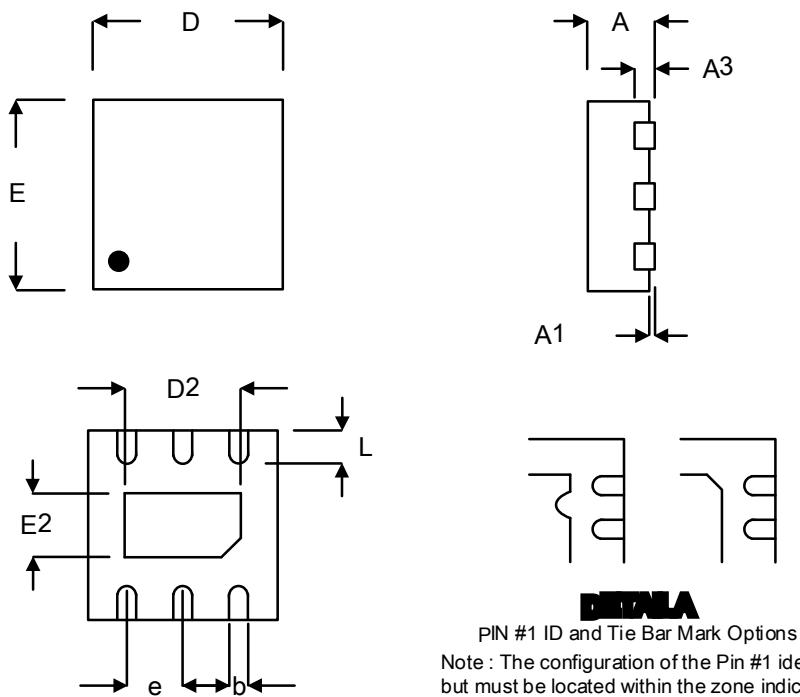

DFNLA
PIN #1 ID and Tie Bar Mark Options
Note : The configuration of the Pin #1 identifier is optional,
but must be located within the zone indicated.

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.175	0.250	0.007	0.010
b	0.200	0.350	0.008	0.014
D	1.950	2.050	0.077	0.081
D2	1.000	1.450	0.039	0.057
E	1.950	2.050	0.077	0.081
E2	0.500	0.850	0.020	0.033
e	0.650		0.026	
L	0.300	0.400	0.012	0.016

DFN-2X2-6L