


## Paddle Bellows Flow Meter/Monitor for Liquids



- Measuring ranges:  
 1-5 l/min to 900-3600 m<sup>3</sup>/h  
 Water
- Measurement accuracy:  
 ±3 to ±5% f.s.
- Connection: G 3/8 to G 2,  
 3/8 NPT to 2 NPT  
 flange: DN 10 to DN 50  
 ANSI 3/8" to 2"
- Weld-on flange for  
 pipe cross-section:  
 DN 40 to DN 500
- Material: brass, PVC  
 or stainless steel
- p<sub>max</sub>: PN 16, t<sub>max</sub>: 100 °C
- for fouled media
- Universal mounting

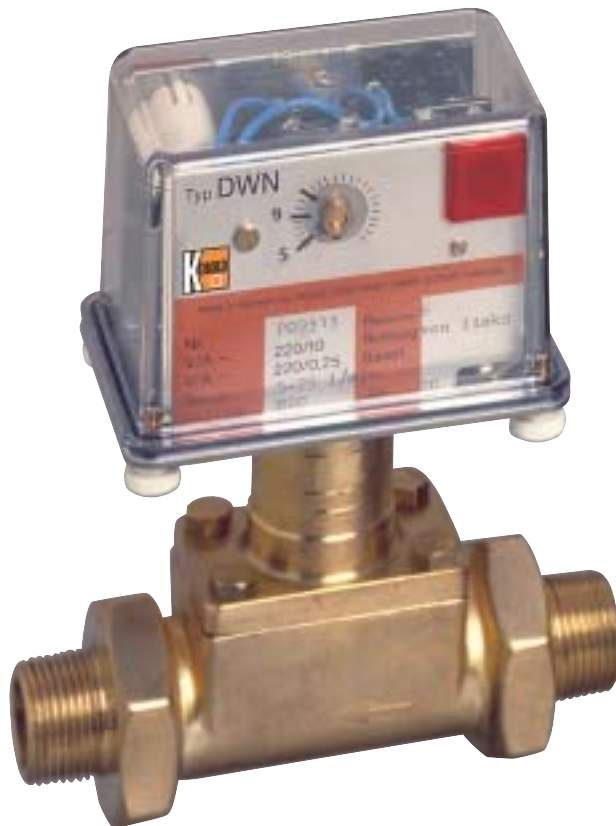

KOBOLD offices exist in the following countries:

**ARGENTINA, AUSTRIA, BELGIUM, BRAZIL, CANADA,  
 CHINA, COLOMBIA, FRANCE, GREAT BRITAIN, NETHERLANDS,  
 POLAND, SWITZERLAND, USA, VENEZUELA**

KOBOLD Messring GmbH  
 Nordring 22-24  
 D-65719 Hofheim/Ts.  
 ☎ (06192) 299-0  
 Fax (06192) 23398  
 E-mail: info.de@kobold.com  
 Internet: www.kobold.com


**Model:**  
 DWN



**Description**

The new KOBOLD flow monitor DWN works according to the diaphragm plate principle. Baffle/paddle (1) is deflected in the flow direction against the force of the spring (2) by the flowing medium.

A stainless steel bellows (3) seals off the system hermetically between medium and measuring unit/indicator.

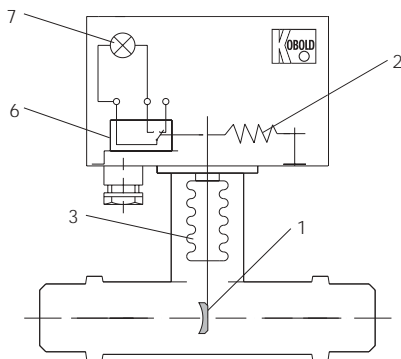

The motion is transferred positively from the baffle (1) to the measuring section.

In the measuring section a microswitch (6) and a pilot lamp (7) are operated as soon as the set switching point is exceeded or undershot. Thus the change in flow is clearly signalled locally by the switching point pilot lamp (illuminates for undershooting). At the same time switching operations are triggered by the microswitch, designed as a 3-pole changeover contact.

The displacement-deflection technique is one of the most secure systems available as motion is transferred positively from the baffle plate to the measuring section. With these flow monitors if the T piece becomes clogged up with lime, foreign objects or dirt, the system responds with "no flow". It is practically impossible for the system to hang up in a position that indicates flow when there is in fact no flow.

**Recommended inlet and outlet pipe section**

Upstream of measuring instrument linear flow = 10 x d  
 Downstream of measuring instrument linear flow = 5 x d  
 d = effective pipe cross-section

**Areas of Application**

- Heavy goods industry
- Rolling mills and mill trains
- Chemicals and pharmaceuticals industries
- Drinks and semi-luxury food industry
- General mechanical engineering and capital equipment
- Measurement and monitoring of product, cooling and lubricant circuits

**Technical Details**

Device part	Material combination		
	5	6	7
T piece	Brass	Stainless steel	PVC
Connecting thread	Brass	Stainless steel	PVC
Connecting flange	Steel zinc-plated	Stainless steel	PVC
Weld-on flange	Steel sprayed	Stainless steel	Boring pipe box PVC
Paddle system	Brass	Stainless steel	Stainless steel
Bellows	Stainless steel	Stainless steel	Stainless steel
Seals	FPM	FPM	FPM
Case meas. section	Stainless steel	Stainless steel	Stainless steel
Covering hood	Polycarbonate	Polycarbonate	Polycarbonate
tmax*	100 °C	100 °C	20 °C (60 °C)
pmax*	16 bar	16 bar	16 bar (2 bar)

\*Higher upon request

- Flow ratio: thread connection: max. 1 : 5  
 Mounting flange: max. 1 : 4
- Repeat accuracy: to 20 l/min.: ± 5 %  
 21 - 200 l/min.: ± 4 %  
 201 and more l/min.: ± 3 %  
 (based on calibration position and medium at 20 °C)
- Pressure loss: 0.1 - 0.3 bar (average pressure loss, value upon request)
- Switching hysteresis: to 2 bar 10%;  
 > 2 bar depending on pressure
- Ambient temperature: max. 70 °C
- Electrical switching capacity: 250 V / 10 A
- Pilot lamp: 230 V<sub>AC</sub>, 110 V<sub>AC</sub> or 24 V<sub>DC</sub>
- Protection type: IP 55 (IP 65 upon request)
- EX design: option EExd IIC T 6,  
 protection type IP 66 flameproof  
 or EEx ia IIC with gold-plated contact.  
 A transistor relay is required for intrinsically safe (circuit) operation, for ex. REL-6000 (see brochure Z2).

**Mounting position**

Due to the positive transmission, the devices can be mounted in all mounting positions – however they must be calibrated for the chosen position. The devices should therefore be mounted in the mounting and calibration position specified on the nameplate, whereby the mounting position refers to the piping run.  
 Installing the devices in positions other than those specified on the nameplate causes measurement inaccuracies. The direction of flow is indicated on the device. Should the medium flow in the opposite direction the device will not operate correctly.



Order details (Example: DWN-15 R10 0 R T 0)

We require the following details as well as the order number: medium, viscosity, service temperature, operating pressure, flow range within the values detailed below with the ratio min/max 1:5 (and 1:4 for type DWN-3...)

Flow monitor model DWN-1.. with male thread connection

Flow range (l/min.)		Material combination (bellows/T piece)			Connection male thread	Pilot lamp	Direction of flow	Location of indicator	Option
min. Water	max. Water	St. steel/ Brass	St. steel/ St. steel	St. steel/ PVC					
1	25	DWN-15..	DWN-16..	DWN-17..	R10 = G 3/8 N10 = 3/8 NPT	0 = 230 V <sub>AC</sub> 1 = 110 V <sub>AC</sub> 3 = 24 V <sub>DC</sub>	R = from right to left L = from left to right T = from top to bottom B = from bottom to top	T = above lead R = right of lead L = left of lead	0 = without D = with damping G = gold plated contacts X = ex contact 2 = Twin contact
1	55	DWN-15..	DWN-16..	DWN-17..	R15 = G 1/2 N15 = 1/2 NPT				
5	100	DWN-15..	DWN-16..	DWN-17..	R20 = G 3/4 N20 = 3/4 NPT				
6	150	DWN-15..	DWN-16..	DWN-17..	R25 = G 1 N25 = 1 NPT				
10	250	DWN-15..	DWN-16..	DWN-17..	R32 = G 1 1/4 N32 = 1 1/4 NPT				
20	400	DWN-15..	DWN-16..	DWN-17..	R40 = G 1 1/2 N40 = 1 1/2 NPT				
50	600	DWN-15..	DWN-16..	DWN-17..	R50 = G 2 N50 = 2 NPT				

Flow monitor model DWN-2.. with flange connection

Flow range (l/min.)		Material combination (bellows/T piece)			Connection flange	Pilot lamp	Direction of flow	Location of indicator	Option
min. Water	max. Water	St. steel/ Brass	St. steel/ St. steel	St. steel/ PVC					
1	25	DWN-25..	DWN-26..	-	F10 = DN 10 A10 = 3/8" ANSI	0 = 230 V <sub>AC</sub> 1 = 110 V <sub>AC</sub> 3 = 24 V <sub>DC</sub>	R = from right to left L = from left to right T = from top to bottom B = from bottom to top	T = above lead R = right of lead L = left of lead	0 = without D = with damping G = gold plated contacts X = ex contact 2 = Twin contact
1	55	DWN-25..	DWN-26..	-	F15 = DN 15 A15 = 1/2" ANSI				
5	100	DWN-25..	DWN-26..	-	F20 = DN 20 A20 = 3/4" ANSI				
6	150	DWN-25..	DWN-26..	DWN-27..	F25 = DN 25 A25 = 1" ANSI				
10	250	DWN-25..	DWN-26..	DWN-27..	F32 = DN 32 A32 = 1 1/4" ANSI				
20	400	DWN-25..	DWN-26..	DWN-27..	F40 = DN 40 A40 = 1 1/2" ANSI				
50	600	DWN-25..	DWN-26..	DWN-27..	F50 = DN 50 A50 = 2" ANSI				


Flow monitor type DWN-35../DWN-36.. with weld-on flange / DWN-37.. with boring pipe box

Flow range (m <sup>3</sup> /h)		Material combination (bellows/connecting piece)			for pipe cross-section	Pilot lamp	Direction of flow	Location of indicator	Option
min. Water	max. Water	St. steel/ Brass	St. steel/ St. steel	St. steel/ PVC					
1.2	24	DWN-35..	DWN-36..	DWN-37..	W40 = DN 40	0 = 230 V <sub>AC</sub> 1 = 110 V <sub>AC</sub> 3 = 24 V <sub>DC</sub>	R = from right to left L = from left to right T = from top to bottom B = from bottom to top	T = above lead R = right of lead L = left of lead	0 = without D = with damping G = gold plated contacts X = ex contact 2 = Twin contact
3.0	36	DWN-35..	DWN-36..	DWN-37..	W50 = DN 50				
4.8	60	DWN-35..	DWN-36..	DWN-37..	W65 = DN 65				
7.2	90	DWN-35..	DWN-36..	DWN-37..	W80 = DN 80				
12	144	DWN-35..	DWN-36..	DWN-37..	W1H = DN 100				
18	225	DWN-35..	DWN-36..	DWN-37..	W1Z = DN 125				
24	330	DWN-35..	DWN-36..	DWN-37..	W1F = DN 150				
42	600	DWN-35..	DWN-36..	DWN-37..	W2H = DN 200				
72	900	DWN-35..	DWN-36..	-	W2F = DN 250				
102	1200	DWN-35..	DWN-36..	-	W3H = DN 300				
150	1800	DWN-35..	DWN-36..	-	W3F = DN 350				
180	2400	DWN-35..	DWN-36..	-	W4H = DN 400				
300	3600	DWN-35..	DWN-36..	-	W5H = DN 500				



**Dimensions**


**DWN-1.. with thread connection**

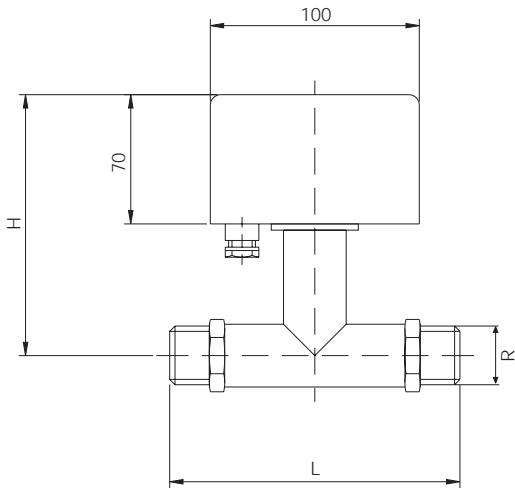

R	H (mm)	L (mm)
3/8	145+1	135+1
1/2	145+1	135+1
3/4	145+1	135+1
1	145+1	135+1
1 1/4	150+2	170+2
1 1/2	155+2	170+2
2	160+2	170+2

We kindly ask you to provide us with a separate inquiry for the exact dimensions of the material combination 3 (PVC).


**DWN-2.. with flange connection**

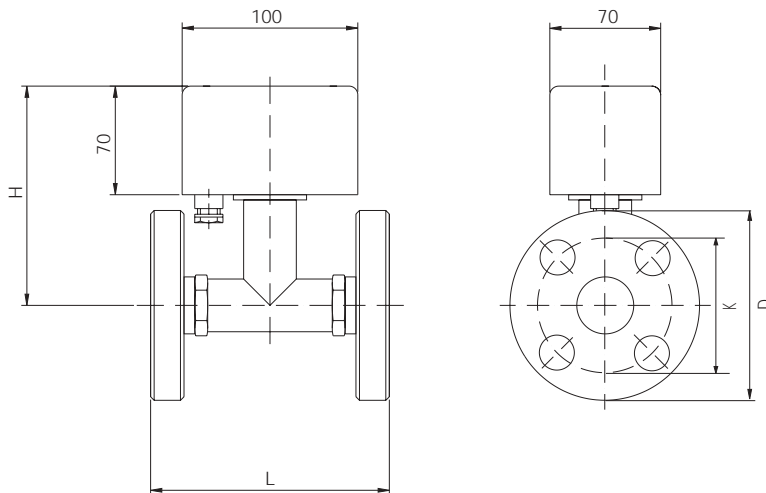

DN	D (mm)	K (mm)	H (mm)	L (mm)
10	90	60	145+1	155+2
15	95	65	145+1	155+2
20	105	75	145+1	160+2
25	115	85	145+1	160+2
32	140	100	150+2	190+2
40	150	110	155+2	190+2
50	165	125	160+2	190+2

We kindly ask you to provide us with a separate inquiry for the exact dimensions of the material combination 3 (PVC).

**DWN-3.. with weld-on flange**

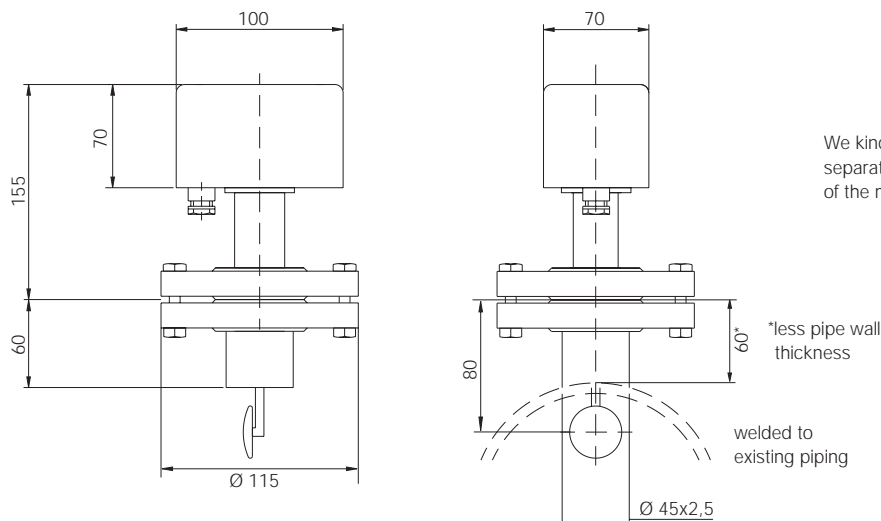

We kindly ask you to provide us with a separate inquiry for the exact dimensions of the material combination 3 (PVC).