



Zertifiziertes
QM-System
DIN EN ISO 9001
Zertifikat-Nr. 01017

Screw-Type Volumetric Flow Meter for Viscous Media




measuring
•
monitoring
•
analysing



Model: ADI-K...

- Measuring ranges:
0.2-10 to 40-2000 L/min liquid
- Measuring accuracy:
 $\pm 0.3\%$ of measured value
- p_{max} : 420 bar; t_{max} : 200 °C
- Viscosity range: 1-5000 mm²/s
- Connection: G ½ to G 4 female,
flange DN 15 to DN 100
- Material: continuously cast, St.St.
- Output: pulses
- Pulsation-free principle of measurement

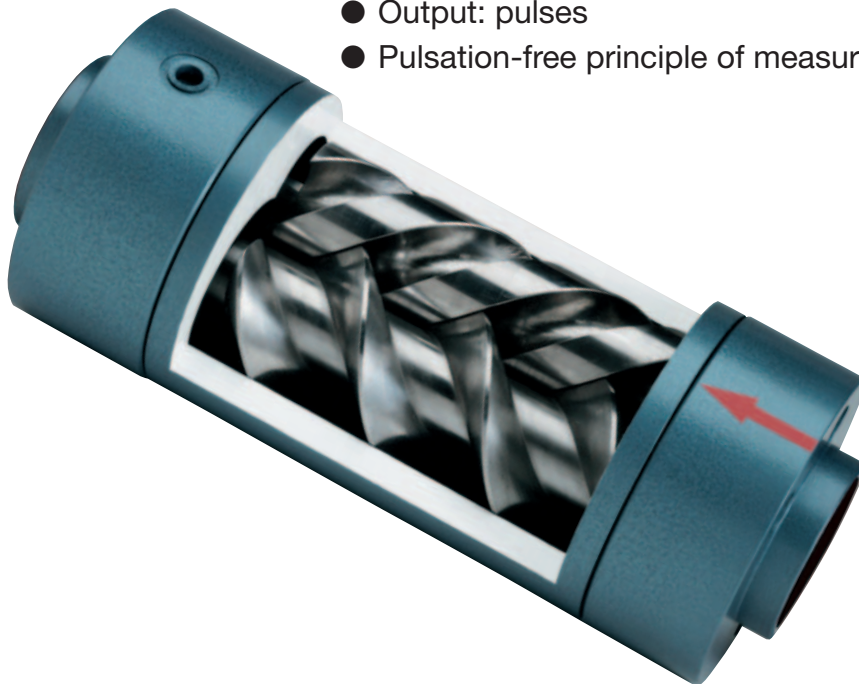

Model: OMG...



KOBOLD offices exist in the following countries:

ARGENTINA, AUSTRIA, BELGIUM, BRAZIL, CANADA, CHINA,
FRANCE, GERMANY, GREAT BRITAIN, ITALY, MEXICO, NETHER-
LANDS, PERU, POLAND, SWITZERLAND, USA, VENEZUELA

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
☎ +49(0)61 92 299-0
Fax +49(0)61 92 233 98
E-Mail: info.de@kobold.com
Internet: www.kobold.com

Model:
OM...

Description

The KOBOLD screw-type volumetric flow meter based on the principle of positive displacement was developed in response to the need to measure and control viscous media.

It was specially designed to measure viscous media with non-abrasive properties. Variations in viscosity in the range 1 to 5000 mm²/s have no effect on measurement results within the measuring accuracy.


The KOBOLD screw-type volumetric flowmeter satisfies the stringent demands for greater accuracy, reliability and economic efficiency. Two spindles with cycloidal profiles form the basis of the screw-type volumetric flow meter.

Spindles manufactured with extreme precision are supported at each end with a ball bearing.

The axially forced measuring medium causes the spindles to rotate uniformly.

The rotary motion is picked off with inductive proximity switches and converted to a frequency signal. An exact measurement of the delivered flow volume is obtained with the volumetrically defined measuring chambers.

Combined with downstream evaluation electronics, the KOBOLD screw-type volumetric flow meter becomes a flexible measurement and control system for viscous media.

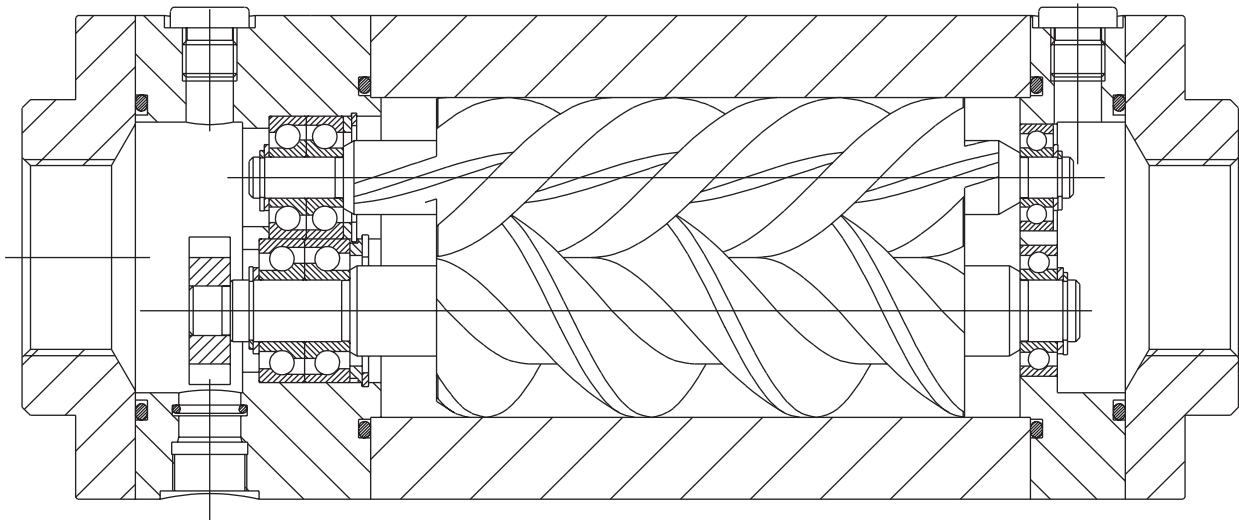

Benefits

- Greater viscosity range (1 to 5000 mm²/s)
- Greater measuring accuracy (max. 0,3% of measured value)
- Greater measuring range (1:70)
- Almost completely insensitive to viscosity
- Greater flow rate combined with minimum space requirements
- High degree of operational reliability and long service life
- Pulsation-free principle of measurement
- Self-cleaning measuring chambers
- Choice of installation position

Areas of Application

- **Furnaces**
EL heating oil, S heating oil, diesel oil
- **Hydraulics, test stands**
Hydraulic oil, lubricating oil, gear oil
- **Mixing and dosing systems**
Polyhydroxy alcohol, isocyanate
Additives for gasoline, cement...
- **Lacquers and fills, printing inks**
- **Chemical industry**
Acids and lyes, ethyl alcohol, freon
- **Food industry**
Margarine, fats, liqueur, oils



Material


Housing: continuously cast (GGC-F)
 Spindles: Steel nitrated
 O-rings: FPM
 Bearings: Deep-grooved ball bearings with metal retainers
 Thread for sensors: M 18 x 1 with O-ring in the case
 Viscosity range: 1 - 5000 mm²/s
 Flange: Steel (material no. 1.7139)
 Rotor: Steel
 Operating temperature: - 20 to + 200 °C (Please note limitation due to pulse generator.)

Order Details (Example: **OMG-15F15 P16/xx**) xx =pulse generator see page 103

Flow rate [L/min]	p _{max} ¹ [bar]	Pulses/L ²	Frequency ² [Hz]	Threaded connection		Flange connection		
				Order No.	G	Order No.	DN	p _{max} ¹ [bar]
0.2 - 10	250	1224	4.1 - 204	OMG-15R15	1/2	OMG-15F15	15	16/40/64/100/160/250
0..6 - 30	250	637	6.4 - 319	OMG-20R20	3/4	OMG-20F15	15	64/100/160/250
						OMG-20F20	20	16/40
2 - 100	250	233	7.8 - 389	OMG-25R25	1	OMG-25F25	25	64/100/160/250
						OMG-25F32	32	16/40
7 - 350	160	71	8.3 - 413	OMG-40R40	1 1/2	OMG-40F40	40	16/40/64/100/160
14 - 700	100	40	9.3 - 464	OMG-50R50	2	OMG-50F50	50	16/40/100
40 - 2000	40	17	11.2 - 558	OMG-1HR1H	4	OMG-1HF1H	100	16/40


1 Please note limitations due to pulse generator.
 2 The exact values are defined by the manufacturer (see nameplate).
 3 Please specify the desired nominal pressure when placing your order (eg, F15/16 = flange DN 15 PN 16).

Accuracy Diagram

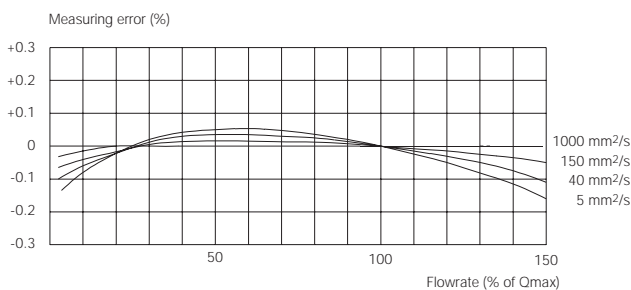

The measuring error refers to the actual flow rate. The diagram shows the characteristic for the OMG-... screw-type volumetric flowmeter. A test certificate is available because every device delivered is different.

Pressure loss Diagram

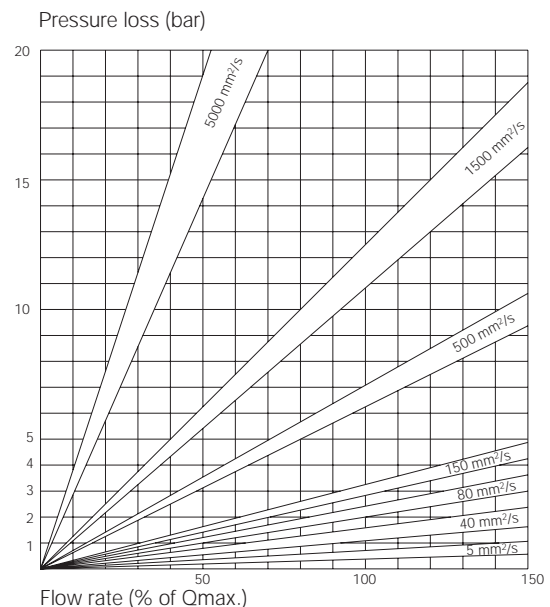



Material

Housing: standard: St. St. (material no. 1.4301)
 option: St. St. (material no. 1.4401)

Spindles: PTFE + 15% graphite

O-rings: FPM or silicone with FEP jacket

Bearings: sliding-contact bearings between spindle and case

Thread for sensor: M 18 x 1
 with O-ring in the case

Viscosity range: 1- 5000 mm²/s

Flange: St. St. (material no. 1.4301 or 1.4401)

Rotor: steel, chemically nickel-plated,
 option: St. St. 1.4401


Operating temperature: - 20 to + 40 °C or
 (+ 20 to + 100 °C upon request)
 (Please note limitation due to pulse generator)

Order Details (Example: **OMK-15F15 P16/xx**) xx = pulse generator see page 103


Flow rate [L/min]	p _{max} ¹ [bar]	Pulses/L ²	Frequency ² [Hz]	Thread connection		Flange connection ³		
				Order no.	G	Order no.	DN	p _{max} ¹ [bar]
0.4 - 10	40	1224	8.2 - 204	OMK-15R15	1/2	OMK-15F15	15	16/40
1.2 - 30	40	637	12.7 - 319	OMK-20R20	3/4	OMK-20F20	20	16/40
4 - 100	40	233	15.6 - 389	OMK-25R25	1	OMK-25F25	25	16/40

1 Higher temperature (+ 20 to + 100 °C upon request).
 2 The exact values are defined by the manufacturer (see nameplate).
 3 Please specify the desired nominal pressure when placing your order (eg, F20/16 = flange DN 20 PN 16).

Accuracy Diagram

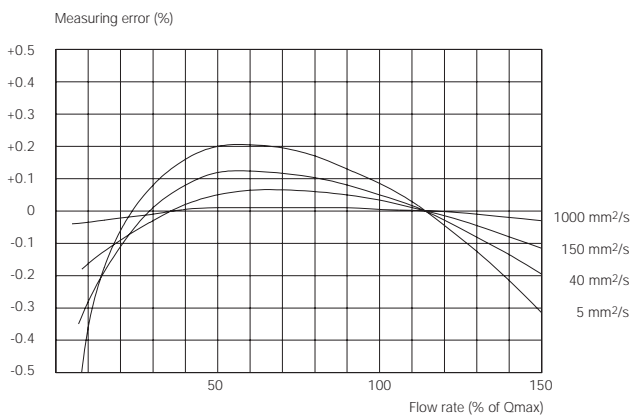

Pressure Loss Diagram

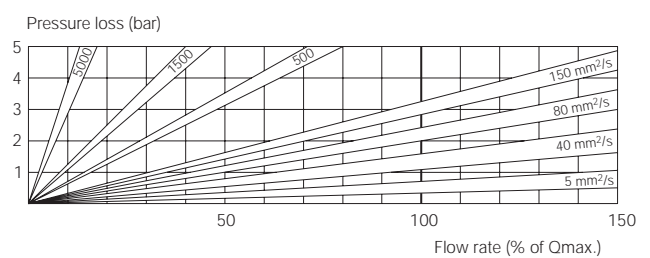

The measuring error refers to the actual flow rate.
 The diagram shows the characteristic for the OMK-... screw-type volumetric flow meter.
 A test certificate is available because every device delivered is different.



Material


- Housing: standard: St. St. (material no. 1.4301)
option: St. St. (material no. 1.4401)
- Spindles: St. St. (material no. 1.4301), nitrated
or 1.4401, nitrated
- O-rings: FPM or silicone with FEP jacket
- Bearings: sliding-contact bearings;
special material
- Thread for sensor: M 18 x 1
with O-ring in the case
- Viscosity range: 1-5000 mm²/s
- Flange: St. St. (material no. 1.4301 or 1.4401)
- Rotor: steel, chemically nickel-plated,
option: St.St. (material no. 1.4401)
- Operating temperature: -20 to +100 °C
(Please note limitation due to pulse generator)

Order Details (Example: **OMS-40F40 P16/xx**) xx = pulse generator see page 103


Flow rate [L/min]	p _{max} ¹ [bar]	Pulses/L ²	Frequency ² [Hz]	Threaded connection		Flange connection ³ Sealing face form C, according to DIN 2526		
				Order no.	G	Order no.	DN	p _{max} ¹ [bar]
7 - 350	40	71	8.3 - 413	OMS-40R40	1 1/2	OMS-40F40	40	16/40
14 - 700	40	40	9.3 - 464	OMS-50R50	2	OMS-50F50	50	16/40

- 1) Please note limitations due to pulse generator.
- 2) The exact values are defined by the manufacturer (see nameplate).
- 3) Please specify the desired nominal pressure when placing your order (eg. F40/16 = flange DN 40 PN 16).


Accuracy Diagram

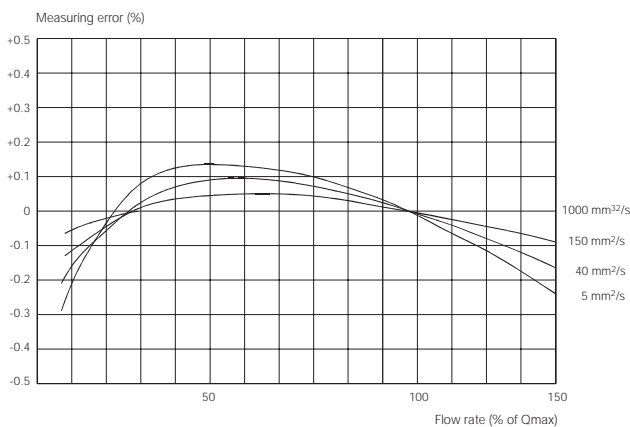

Pressure Loss Diagram

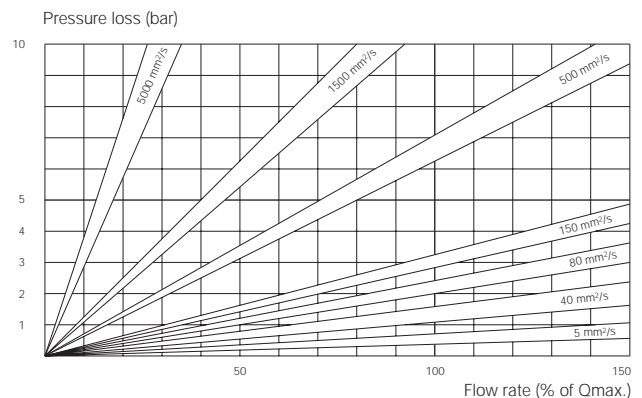

The measuring error refers to the actual flow rate. The diagram shows the characteristic for the OMS-... screw-type volumetric flow meter. A test certificate is available because every device delivered is different.

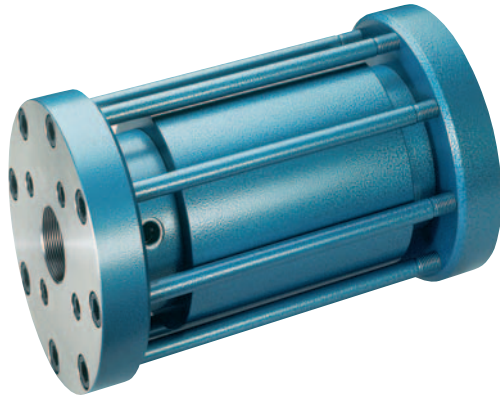

Material


- Housing: continuously cast / steel GGGC-40
- Spindles: Steel, nitrated
- O-rings: FPM
- Bearings: Deep-grooved ball bearing with metal retainers
- Thread for sensor: M 18 x 1 with O-ring in the case
- Viscosity range: 1-5000 mm²/s
- Flange: Steel (material no. 1.7139)
- Operating temperature: -20 to +200 °C (Please note limitation due to pulse generator)

Order Details (Example: **OMH-15F15 P15/xx**) xx = pulse generator see page 103

Flow rate [L/min]	p _{max} ¹ [bar]	Pulses/L ²	Frequency ² [Hz]	Threaded connection		Flange connection ³		
				Order-no.	G	Option	DN	p _{max} ¹ [bar]
0.2 - 10	420	1224	4.1 - 204	OMH-15R15	1/2	OMH-15F15	15	400
0.6 - 30	420	637	6.4 - 319	OMH-20R20	3/4	OMH-20F15	15	400
2 - 100	420	233	7.8 - 389	OMH-25R25	1	OMH-25F25	25	400
7 - 350	420	71	8.3 - 413	OMH-40R40	1 1/2	OMH-40F40	40	400
14 - 700	420	40	9.3 - 464	OMH-50R50	2	OMH-50F50	50	400
40 - 2000	250	17	11.2 - 558	OMH-1HR1H	4	OMH-1HF1H	100	250


1) Please note limitations due to pulse generator.
 2) The exact values are defined by the manufacturer (see nameplate).

Accuracy Diagram

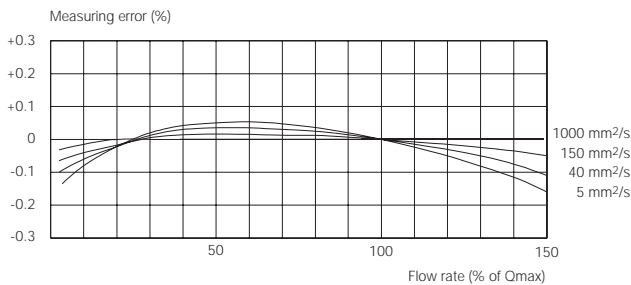

The measuring error refers to the actual flow rate. The diagram shows the characteristic for the OMH-... screw-type volumetric flow meter. A test certificate is available because every device delivered is different.

Pressure Loss Diagram

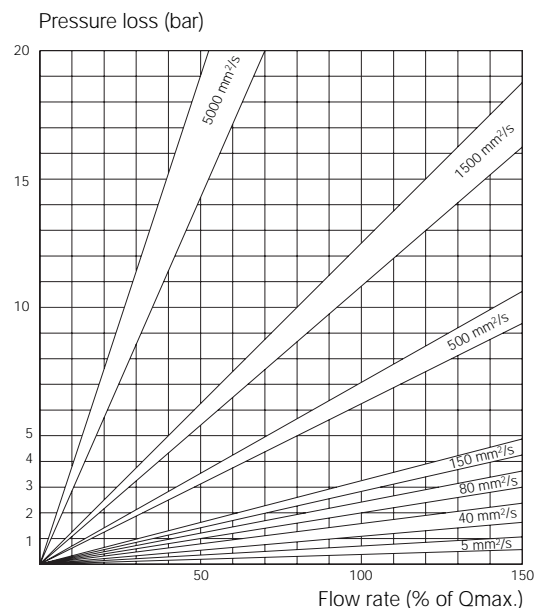


Method of Operation


The rotor of the screw-type volumetric flow meter rotates at a precisely defined distance in front of the pulse generator. The pulse generator generates a pulse for every pole that moves past it.

The screw-type volumetric flow meter is checked and delivered with a built-in dry sleeve. The transmitter insert for the pulse generator can be replaced online in a full line, without having to re-adjust the clearance to the rotor.


OM.../43 and OM.../46

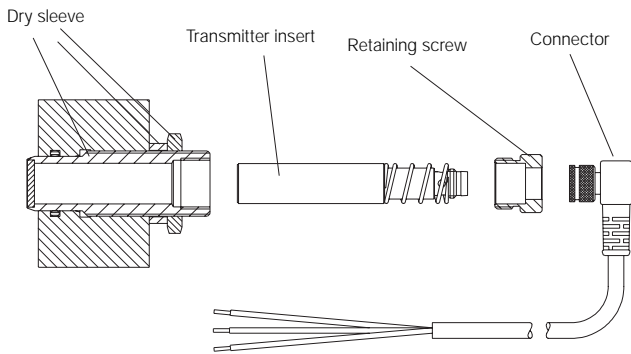

OM.../44 and OM.../47

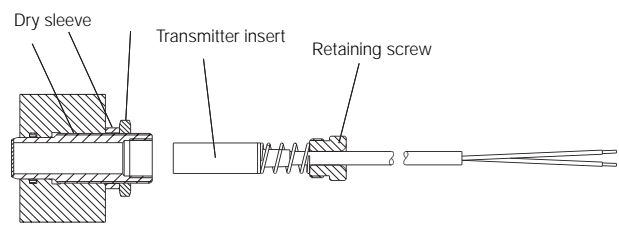

OM.../45

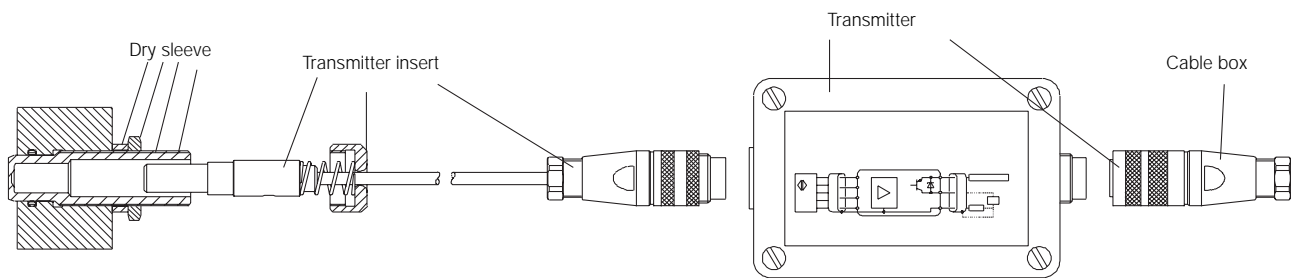


Selection Table for Pulse Generators

Order No.	System	Voltage	t _{max}	p _{max} face	Material dry sleeve	Electrical connection	Protection type
OMG.../43	Inductive PNP	10 to 30 V _{DC}	-20...+100 °C (-25...+90 °C)*	250 bar	Arcap/ ceramics	Right-angle plug with LED and 3 m cable	IP 65
OMK.../46	Inductive PNP	10 to 30 V _{DC}	-20...+100 °C (-25...+90 °C)*	40 bar	1.4401/ ceramics	Right-angle plug with LED and 3 m cable	IP 65
OMG.../44 OMH.../44	Hall-effect PNP	10 to 30 V _{DC}	-40...+150 °C	420 bar	Arcap	3 m PTFE cable	IP 67
OMG.../45 OMH.../45	Magnetic PNP	10 to 30 V _{DC}	-40...+250 °C (0...+50 °C)**	420 bar	Arcap	Cable box/ 1 m PTFE cable	IP 65
OM.../47	Inductive Namur	5 to 25 V _{DC}	-25...+100 °C	40 bar	1.4401/ ceramics	2 m PVC cable EEx ia IIC T6	IP 68


*connector

**transmitter

Model OMG-15..




Model OMG-20.../OMG-25...




Model	Pipe thread						Model	Pipe thread					
	R [inch]	p [bar]	L [mm]	D [mm]	t [mm]	m [kg]		R [inch]	p [bar]	L [mm]	D [mm]	t [mm]	m [kg]
OMG 15	1/2"	250	145	90	16	4.6	OMG 20	3/4"	250	145	74	16	4.1
							OMG 25	1"	250	215	104	18	11

Model OMG-40.../OMG-50.../OMG-100...

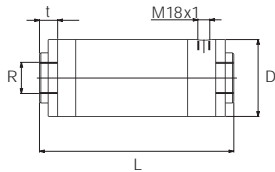


Model OMK-15.../OMK-20.../OMK-25...

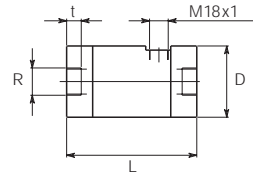


Model	Pipe thread						Model	Pipe thread					
	R [inch]	p [bar]	L [mm]	D [mm]	t [mm]	m [kg]		R [inch]	p [bar]	L [mm]	D [mm]	t [mm]	m [kg]
OMG 40	1 1/2"	160	295	118	27.5	18	OMK 15	1/2"	40	110	59	14	2.0
OMG 50	2"	100	355	138	30	29	OMK 20	3/4"	40	125	69	14	3.0
OMG 100	4"	40	480	188	40	70	OMK 25	1"	40	180	104	18	11

Model OMK-40.../OMK-50...

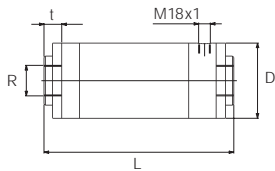


Model OMH-13.../OMH-20.../OMH-25...




Model	Pipe thread						Model	Pipe thread					
	R [inch]	p [bar]	L [mm]	D [mm]	t [mm]	m [kg]		R [inch]	p [bar]	L [mm]	D [mm]	t [mm]	m [kg]
OMK 40	1 1/2"	40	295	118	27.5	18	OMH 15	1/2"	420	150	100	28	7
OMK 50	2"	40	355	138	30	29	OMH 20	3/4"	420	185	145	35	13
							OMH 25	1"	420	255	180	40	27

Model OMH-40.../OMH-50...

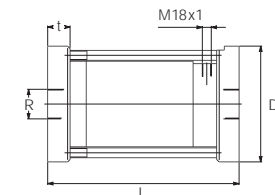

Model OMH-100...

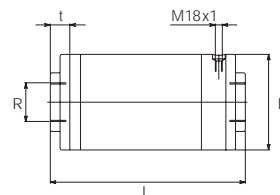

Model	Pipe thread						Model	Pipe thread					
	R [inch]	p [bar]	L [mm]	D [mm]	t [mm]	m [kg]		R [inch]	p [bar]	L [mm]	D [mm]	t [mm]	m [kg]
OMH 40	1 1/2"	420	320	220	40	57	OMH 100	4"	250	500	247	50	135
OMH 50	2"	420	385	235	45	76							