



Insertion Resistance Thermometers with Plug-and-Socket Connection according to DIN 43650 and Integrated Transmitter



measuring
•
monitoring
•
analysing



- Economically-priced digital thermometers with optional plug-on display
- Compact construction with integrated transmitter
4 - 20 mA output
- Measuring ranges:
-200 ... +600 °C
- Material: stainless steel
- Connector DIN 43 650
- Good immunity to vibration



KOBOLD offices exist in the following countries:

ARGENTINA, AUSTRIA, BELGIUM, BRAZIL, CANADA, CHINA,
FRANCE, GERMANY, GREAT BRITAIN, ITALY, MEXICO, NETHER-
LANDS, PERU, POLAND, SWITZERLAND, USA, VENEZUELA

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
☎ +49(0)6192 299-0
Fax +49(0)6192 23398
E-Mail: info.de@kobold.com
Internet: www.kobold.com

Model:
TMA

Insertion Resistance Thermometers

with Plug-and-Socket Connection according to DIN 43 650 and Integrated Transmitter



Description

The screw-in temperature sensors with integrated transmitter are used with the plug-on display model AUF... as economical digital thermometers with analogue output (4-20 mA). The plug-on display is available with limit contact as an option.

The model TMA-... temperature sensors comprise a rugged sensor made of stainless steel with fixed G 1/2 or 1/2 NPT external thread. The bulbs have been designed for pressures up to 36 bar, depending on the process conditions.

A connector according to DIN 43 650 allows the transmitter to be easily connected electrically or retrofitted with the plug-on display.

The temperature sensor is equipped with a stand-off for process temperatures > 150 °C.

A Pt 100 temperature sensor according to IEC 751, category B is fitted in the measuring insert as standard.

Transmitter

Temperature sensors with transmitter are used to transmit measuring signals noise-free over long distances.

The two-wire transmitter is integrated in the resistance thermometer and outputs a temperature linear output signal of 4-20 mA.

Applications

- Heating installation, furnace and apparatus construction
- Machine construction and building installations
- Marine engineering
- General industrial

Technical Details

Temperature sensor

Bulb: stainless steel 1.4571
 Thread: stainless steel 1.4571, G 1/4, G 1/2, 1/2 NPT
 Transmitter housing: stainless steel
 p_{max}: 36 bar
 Sensor element: Pt 100/2-wire, category B
 Connector: DIN 43 650
 Protection: IP 65

Transmitter

Output: 4 - 20 mA
 Supply voltage: 12 ... 30 V_{DC}
 Min. measuring span: 50 K
 Ambient temperature: -40 ... +85 °C
 Measuring range: -50 ... +200 °C (TMA-0/TMA-V)
 -200 ... +600 °C (TMA-H/TMA-A)

Plug-on display

Display: 4-segment, red LED
 Height of digits 7.62 mm
 -1999 ... +9999
 Indicating range: -1999 ... +9999
 Voltage drop: ≤ 5 V_{DC}
 Programming: with 2 buttons, menu-assisted scaling of indicating range
 decimal point, damping, fault indication, switch point (optional)
 Protection: IP 65
 Ambient temperature: 0 ... +60 °C


Order Details (Example: TMA-064 03 1 05)

Model screw connection	Model relocatable screw conn.	Immersion length (mm)	Connection	Transmitter measuring range
TMA-06403..	TMA-V6403..	25 mm*	..1.. = G 1/4 ..2.. = G 1/2 ..8.. = 1/2 NPT	..05 = 0...50 °C ..10 = 0...100 °C ..12 = 0...120 °C ..xx = others**
TMA-06405..	TMA-V6405..	50 mm		
TMA-06410..	TMA-V6410..	100 mm		
TMA-06416..	TMA-V6416..	160 mm		
TMA-06420..	TMA-V6420..	200 mm		
TMA-064xx..	TMA-V64xx..	Spec. lengths**		
TMA-H6405..	TMA-A6405..	50 mm	..1.. = G 1/4 ..2.. = G 1/2 ..8.. = 1/2 NPT	..24 = -200...+400 °C ..26 = -200...+600 °C ..20 = 0...+200 °C ..40 = 0...+400 °C ..60 = 0...+600 °C ..xx = others
TMA-H6410..	TMA-A6410..	100 mm		
TMA-H6416..	TMA-A6416..	160 mm		
TMA-H6420..	TMA-A6420..	200 mm		
TMA-H64xx..	TMA-A64xx..	Spec. lengths**		


* By temperature deduction limited accuracy

**Please specify in writing special measuring range for transmitter (min. measuring span: 50 K) and special lengths for sensor

TMA-0
Standard

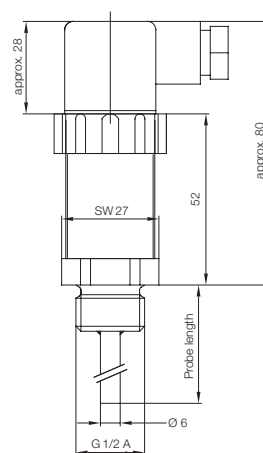

TMA-H/TMA-A
Stand-off

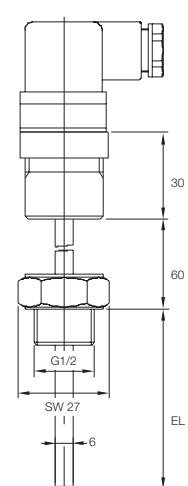

Order Details for plug-on display

Model	Description
AUF-1000	Standard plug-on display
AUF-1001	Plug-on display with open collector switch