

# GLC-T-B

## 10/100/1000BASE-T SFP Transceiver

### Features

- ◆ Support 10/100/1000BASE-T operation in host systems with SGMII interface
- ◆ Up to 1.25Gbps bi-direction data links
- ◆ Hot-pluggable SFP footprint
- ◆ Fully metallic enclosure for low EMI
- ◆ Low power dissipation (1.05 W typical)
- ◆ Compact RJ-45 connector assembly
- ◆ 100m transmission over unshielded twisted pair(UTP) Category 5 Cable
- ◆ Access to physical layer IC via 2-wire serial bus



### Applications

- ◆ LAN 1000Base-T
- ◆ 1.25 Gigabit Ethernet over Cat 5 cable
- ◆ Switch to Switch interface
- ◆ Router/Server interface

### Product Description

GLC-T-B 10/100/1000BASE-T Copper Small Form Pluggable (SFP) are based on the SFP Multi Source Agreement (MSA). It is compatible with the Gigabit Ethernet and 10/100/1000BASE-T standards as specified in IEEE Std 802.3

## Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max
Maximum Supply Voltage	Vcc	-0.5		4.0
Storage Temperature	TS	-40		85

## Normal operating condition

Parameter	Symbol	Min	Typ	Max	Units	Ref.
Operating Temperature	Top	0		70	°C	
Supply Voltage	Vcc	3.14	3.3	3.46	V	

## Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Units	Notes/Condi tions
<b>+3.3 Volt Electrical Power Interface</b>						
Supply Current	Icc		300	350	mA	
Input Voltage	Vcc	3.13	3.3	3.47	V	
Surge Current	I <sub>surge</sub>			30	mA	
<b>Low-Speed Signals, Electronic Characteristics</b>						
SFP Output LOW	VOL	0		0.5	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Output HIGH	VOH	host_ Vcc - 0.5		host_ Vcc + 0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector
SFP Input LOW	VIL	0		0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector
SFP Input HIGH	VIH	2		Vcc + 0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side of

						connector
<b>High-Speed Electrical Interface, Transmission Line-SFP</b>						
Line Frequency	fL		125		MHz	5-level encoding, per IEEE 802.3
Tx Output impedance	Zout,TX		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz
Rx Input Impedance	Zin,RX		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz
<b>High-Speed Electrical Interface, Host-SFP</b>						
Single ended data input swing	Vin	250		1200	mV	Single ended
Single ended data output swing	Vout	350		800	mV	Single ended
Rise/Fall Time	Tr,Tf		175		psec	20%-80%
Tx Input Impedance	Zin		50		Ohm	Single ended
Rx Output Impedance	Zout		50		Ohm	Single ended

## General specifications

Parameter	Symbol	Min	Typ	Max	Units	Notes/Conditions
Datarate		10		1000	Mbps	
Distance				100	m	Category 5 UTP. BER <10 <sup>-12</sup>

## Pin Descriptions


Pin No.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	
2	TX Fault	Transmitter Fault Indication	3	Not used

3	TX Disable	Transmitter Disable	3	1
4	MOD-DEF2	Module Definition 2	3	2
5	MOD-DEF1	Module Definition 1	3	2
6	MOD-DEF0	Module Definition 0	3	2
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	Not Used
9	VeeR	Receiver Ground	1	
10	VeeR	Receiver Ground	1	
11	VeeR	Receiver Ground	1	
12	RD-	Inv. Received Data Out	3	
13	RD+	Received Data Out	3	
14	VeeR	Receiver Ground	1	
15	VccR	Receiver Power	2	
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	
19	TD-	Inv. Transmit Data In	3	
20	VeeT	Transmitter Ground	1	

#### Notes:

1. PHY disabled on TDIS > 2.0V or open, enabled on TDIS < 0.8V, used to reset the module.
2. Should be pulled up with 4.7k – 10k Ohms on host board to a voltage between 2.0 V and 3.6 V. MOD\_DEF(0) pulls line low to indicate module is plugged in.

**The following is the Diagram of host board connector block pin numbers and names**

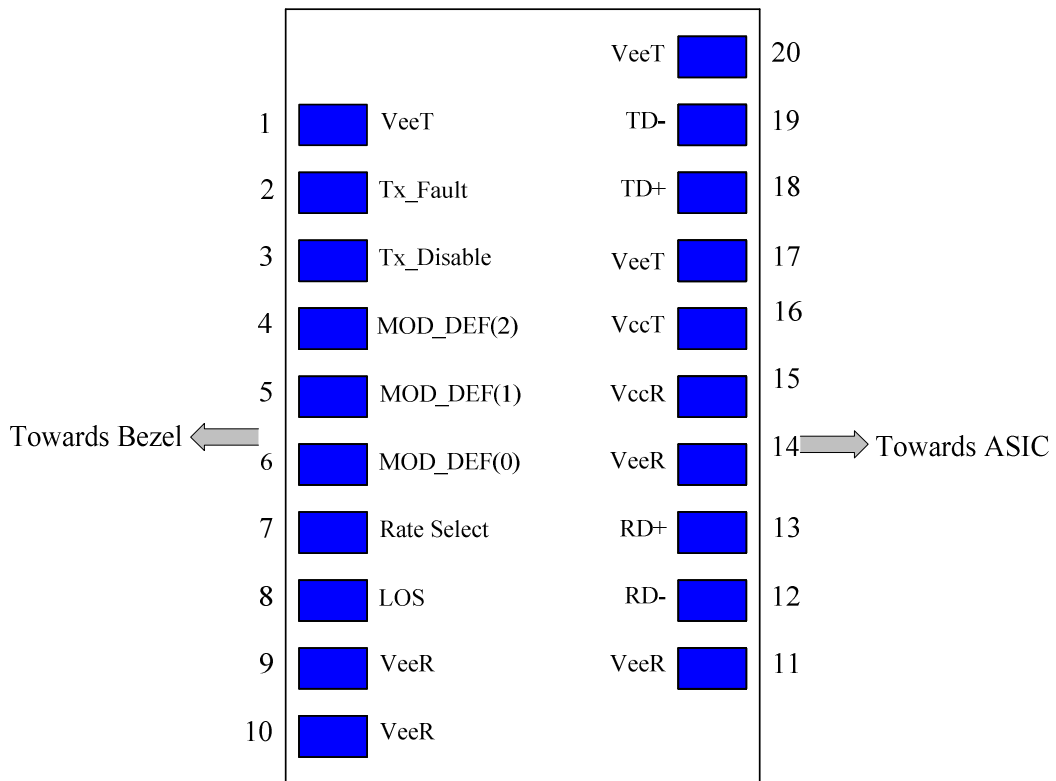


## Serial Communication Protocol

Zyтом Copper SFPs support the 2-wire serial communication protocol outlined in the SFP MSA. These SFP use a 128 byte EEPROM with an address of A0h. The 10/100/1000BASE-T physical layer IC can also be accessed via the 2-wire serial bus at address ACh.

## Mechanical Specifications

Zyтом’s Copper SFP transceivers are compliant with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).

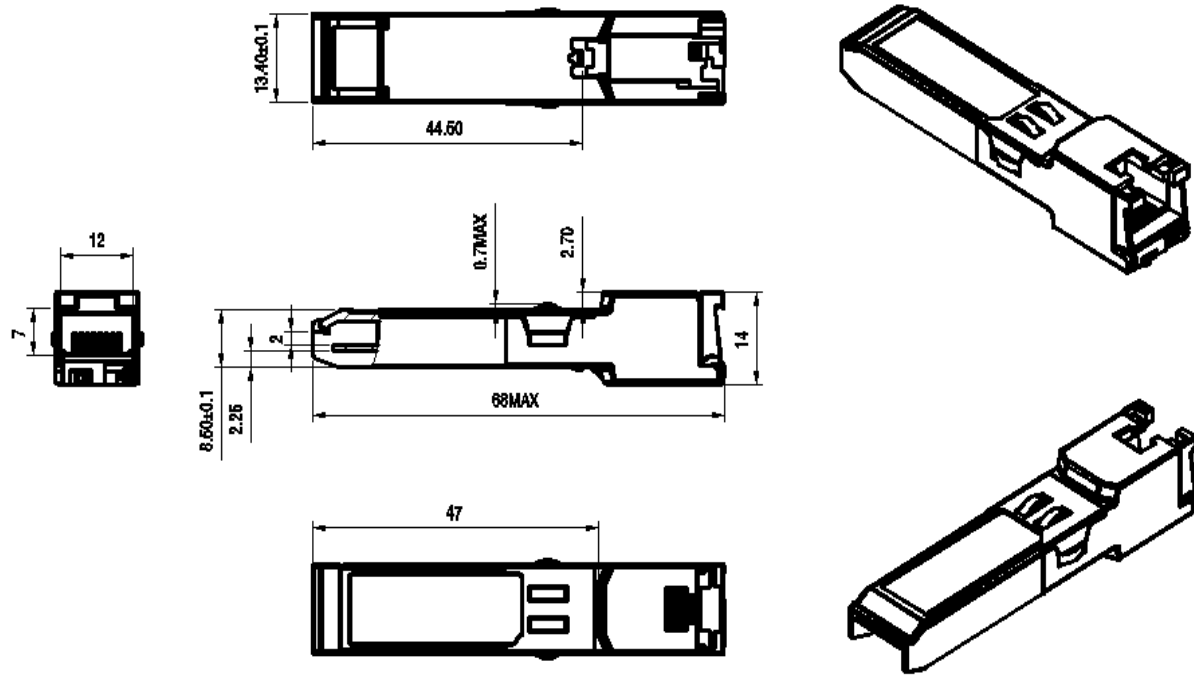

### Order Information

Part No.	Data Rate	Link type	Distance	Connector
GLC-T-B	10/100/1000M	Cat5	100m	RJ45

### NOTICE:

Zyтом reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the optical link products are for illustrative purposes only. Zyтом makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**CONTACT:**

**Add:** C5, 17th Floor, Yue Hu Building, Minzhi Road, Bao'an District, Shenzhen, China

**Tel:** (+86) 0755-8116111

**Fax:** (+86) 0755-26859755

**Postal:** 518131

**E-mail:** sales@zytom.com

<http://www.zytom.com>