


## 1 产品型号及含义 Product Types and Meanings

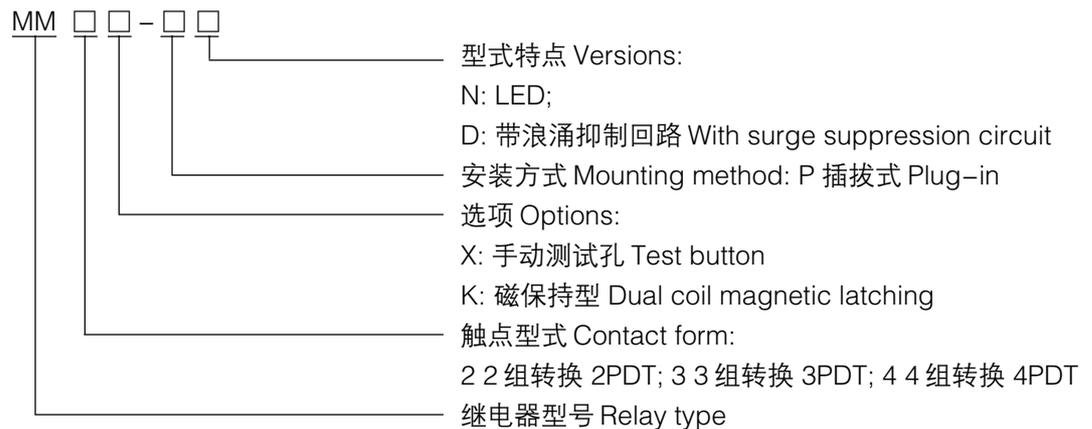


## 2 性能参数 Specification

型号 Type		MM2P,3P,4P	MM3KP,MM4KP
动作电压 Bick-up voltage		≤ 80%us,80% of rated voltage	
释放电压 Drop-out voltage	AC	≥ 30%us,30% of rated voltage	
	DC	≥ 15%us,15% of rated voltage	
最大连续工作电压 Max supply voltage		110%us,110% of rated voltage	
动作时间 Operating time		30ms	35ms
释放时间 Release time		30ms	35ms
线圈电压 Coil voltage	AC	6~380V	
	DC	6~220V	
线圈额定功率 Nominal coil power		2.5W/4VA	动作线圈 Set coil: 2.5W/4VA
			复位线圈 Reset coil: 2W/3.5VA
额定绝缘电压 Rated insulation voltage		380V	
接触电阻 Contaet resistance		≤ 50mΩ	
绝缘电阻 Contaet resistance		500MΩ	
介质耐压 Insulation strength		2500V AC/1min	
环境温度 Ambient temperature		-10℃ ~ +55℃	
环境湿度 Humidity		35%~85%RH	
大气压力 Atmospheric		86~106KPa	

型号 Type	MM2P	MM3P,4P	MM3KP,MM4KP
开闭频率 Operation cycle	20cpm		
振动 Vibration	10~60Hz 双振幅 Dual amplitude: 3ømm		
冲击 Shock	20G(正弦半波脉冲: 11ms) (Half a wave of pules of sine: 11ms)		
机械寿命 Mechanical life	$1 \times 10^7$		
电寿命 Electrical life	$1 \times 10^5$		
触头负载(阻性)Contact capacity	30A/250VAC 28V DC		
重量 Net weight	220g	405g	580g

### 3 外形图、接线图、安装孔尺寸 Dimension, Bottom View

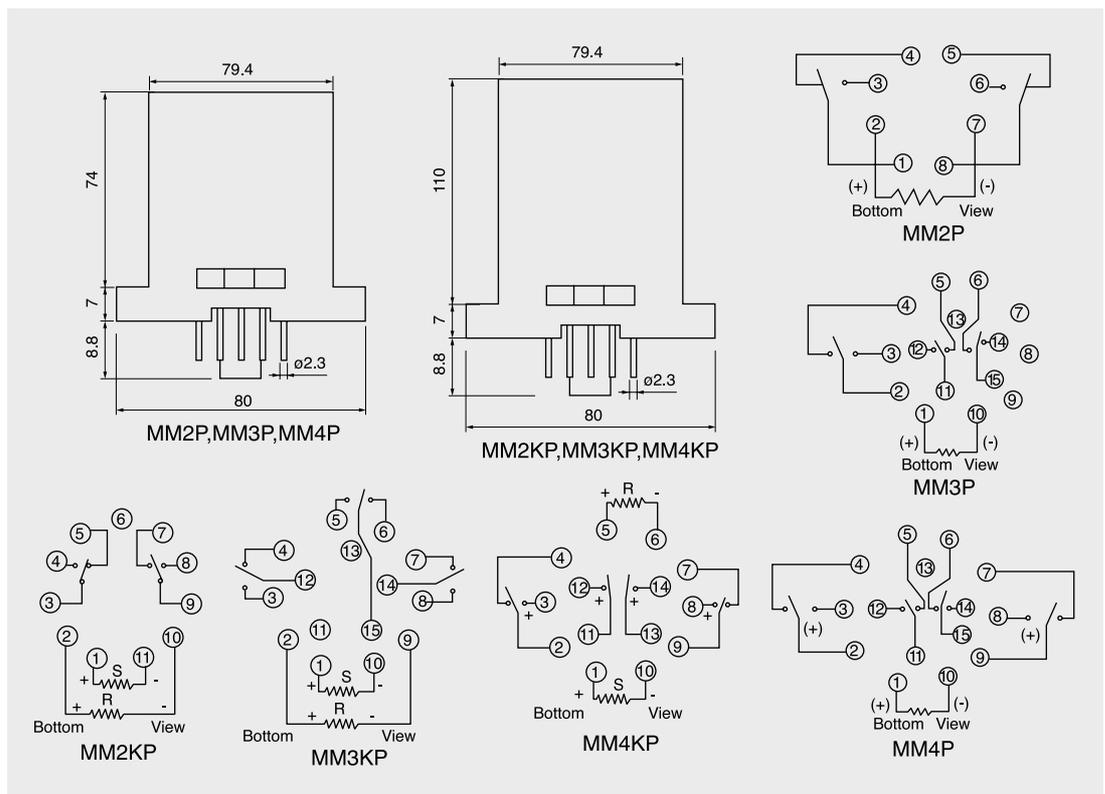

### 4 性能曲线图 Reference Data

