


Video Borescope User Guide



Video Borescope with Orange Rubber Cover





PE Carry Case

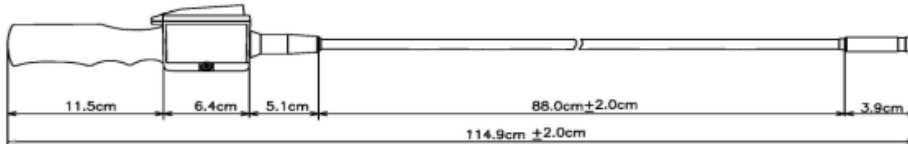

- PE covered metal tube: diameter 6.8 mm; with ABS handler: 114.9 cm long





- Water resistant IP 67 camera head: outer diameter 10.0 mm, with two dimmable LED
- Lens: F#: 2.8 viewable of angle:54°; Focal distance: 3 ~ 6 cm

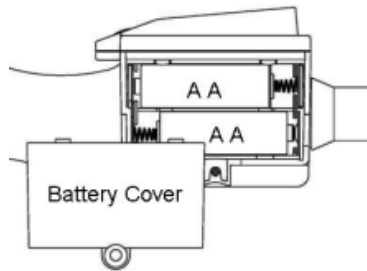

- 2.4" TFT LCD; 320 x 234 resolution
- 3 buttons: On/Off ; LED light Up / Down

Powered by 4 x 1.5V AA batteries (Not included)



- NTSC TV video AVI output (with video wire)
 - Model: TF2809
- Magnetic & hook attachments for the camera head

网址: www.hmyes.com 电话: 0370-4196526 4196655 18272665998
传真: 0370-4196655 地址: 河南省虞城钢卷尺工业园区长江路北段东侧



華鳴儀器設備有限公司

Huaming Instrument & Equipment CO.,LTD

- Degree
- 4 X
- CLASS

| | |
|-------------------------------|----------------------|
| 2.4" TFT resolution | 320 x 234 Pixels |
| Lens sensor resolution | 320 x 240 Pixels |
| Sensitivity | 0.7V(Lux.sec) |
| Color Mosaic | RGB Bayer pattern |
| White comparison | Automatic |
| Exposure to light | Automatic |
| Video format | NTSC composite video |
| Camera illumination | 2 LEDs, white |
| Handler end AVI port | NTSC signal out |
| Power by | 4 X 1.5V AA |
| Power Consumption | 200 mA |
| Ambient/operation temperature | 0 to 45 °C |
| TV Cable length | Approx 1.5 M |
| Total length of device | 114.9 + - 2.0 cm |
| Metal tube length | 88.0 + - 2.0 cm |
| Minimum bending radius | 4.5 cm |
| Diameter of camera head | 10.0 mm |
| Lens coverage | 54° |
| Short distance focus | 3 ~ 6 cm |
| Weight without accessories | Approx. 370 gm |

- of protection: IP20
- 1.5V AA
- 1 LASER PRODUCT
- Classified with EN 60825-1:2007

Technical Data

网址: www.hmyes.com 电话: 0370-4196526 4196655 18272665998
 传真: 0370-4196655 地址: 河南省虞城钢卷尺工业园区长江路北段东侧