


REVISIONS				
REV	DATE	DESCRIPTION	BY	APP. BY
△				
△				
△				

DRAWING NO. SA 12102

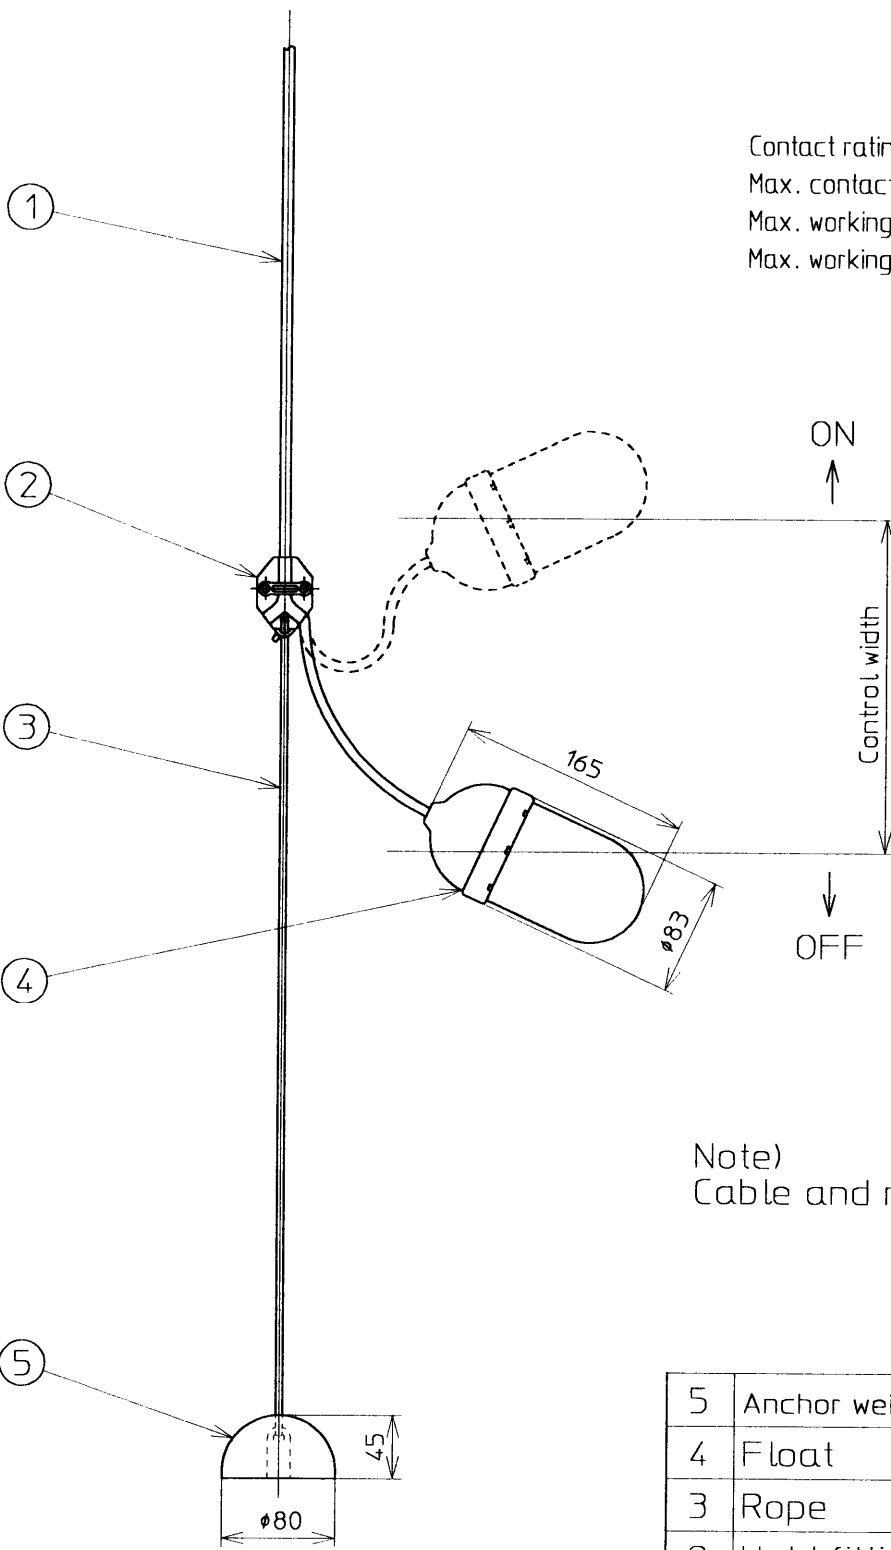

Contact rating
 Max. contact capacity : 50VA AC , 50W DC
 Max. working current : 0.5A AC , 0.5A DC
 Max. working voltage : 300V AC , 300V DC

Note)
 Cable and rope length : 6m

5	Anchor weight	1	Gray iron casting
4	Float	1	Acrylonitrile-butadiene-styrene
3	Rope	1	Polyethylene
2	Hold fitting	1	Acrylonitrile-butadiene-styrene
1	Cable	1	Polyvinyl chloride (VCTF2X0.75mm ²)
P.No.	Name	Qty.	Material

DATE 09-20-'91	DR. BY <i>T. Fujii</i>
SCALE -	CH. BY <i>M. Adachi</i>
UNITS MILLIMETERS	APP. BY <i>Z. Yamamoto</i>

TITLE OUTLINE DRAWING OF QUICK FLOAT

MODEL FQ-8 SHEET NO.



NOHKEN INC.
 OSAKA, JAPAN

DRAWING NO. SA 12102