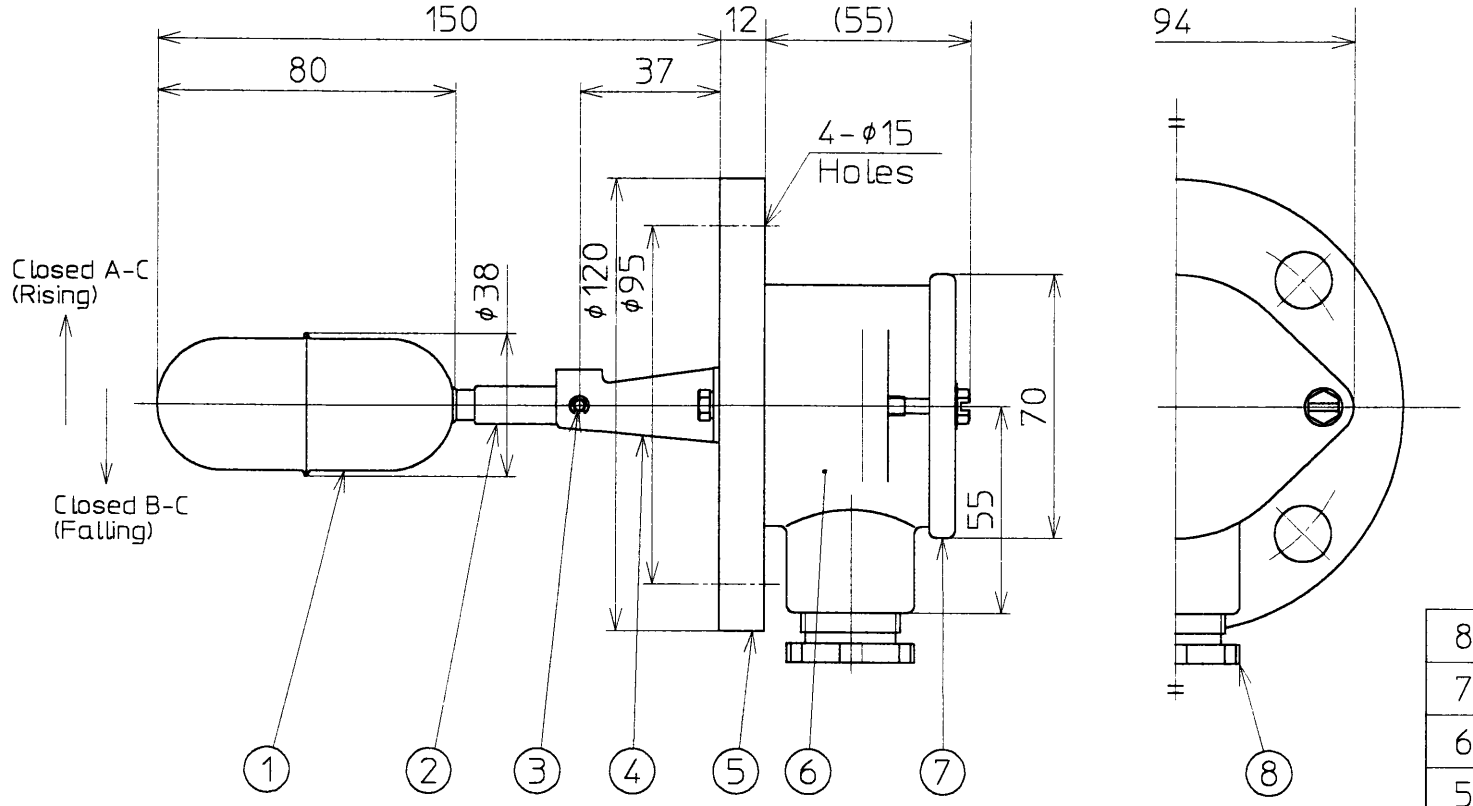

Internal circuit



Contact rating
Max. contact capacity :50VA AC , 50W DC
Max. working current :0.5A AC , 0.5A DC
Max. working voltage :300V AC , 300V DC

Flange size : JIS 5K 40A
Cable inlet : JIS F 20a (G 3/4)

P.No	Name	Qty.	Material
8	Cable gland	1	Brass (Nickel plating)
7	Cover	1	Aluminium diecasting (ADC12)
6	Terminal box	1	Aluminium diecasting (ADC12)
5	Flange	1	Stainless steel (SUS304)
4	Hold fitting	1	Stainless steel (SUS304)
3	Pin	1	Stainless steel (SUS304)
2	Shaft	1	Stainless steel (SUS316)
1	Float	1	Stainless steel (SUS316)

REV	DATE	DESCRIPTION	BY	APP.BY
△				
△				
△				

REVISIONS

DATE 09-10- '91 DR.BY
SCALE 1:2 CH.BY
UNITS MILLIMETERS APP.BY

NOHKEN INC
OSAKA , JAPAN

TITLE OUTLINE DRAWING OF MAGNETIC LEVEL SWITCH

MODEL FM-12 SHEET NO.

DRAWING NO. SA 04047

DRAWING NO SA 04047