

baelz 電動控制閥


baelz Electric control valve

■ (1) 參數說明: Parameter Description





型號 Model	三通控制閥: K342 Three-way control valves: K342 兩通控制閥: K340 Two-way control valves: K340
操作電壓 Operating Voltage	AC220V ± 10% 50Hz/60Hz
工作溫度 Temperature	-10°C ~ 350°C
本體耐壓 Body Pressure	PN16及PN25
控制方式 Control mode	P,PI,PID
軸封形式 Seal Way	Bellow+PTFE+Gland
執行器扭力 Actuator torque	2000N
傳動器耐溫 Actuator temperature	0 ~ 50°C
口徑 Size	DN25 ~ DN80 (1" ~ 3")
最大洩露量 Maximum leakage	0.01% Kvs
適用流體 For fluid	熱煤油、熱油、蒸汽、熱水、水、氣體 Heat medium oil, Heat oil, Steam, Hot water, water, Gas
本體材質 Body Material	GGG40.3 Nodular cast iron

■ (2) 結構圖: Structure drawing

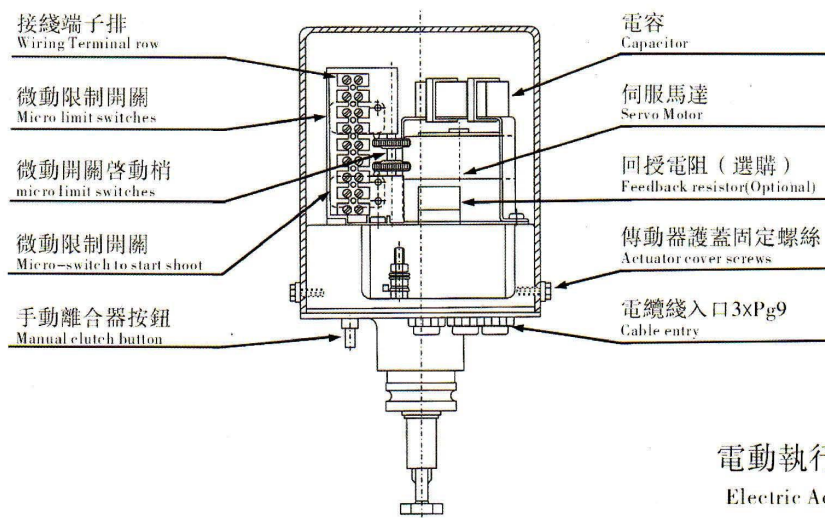

閥體尺寸圖 (單位: mm) Body Size Chart(Units:mm)

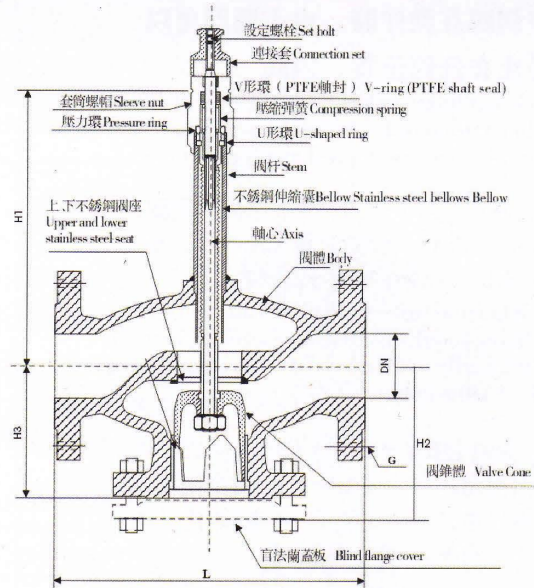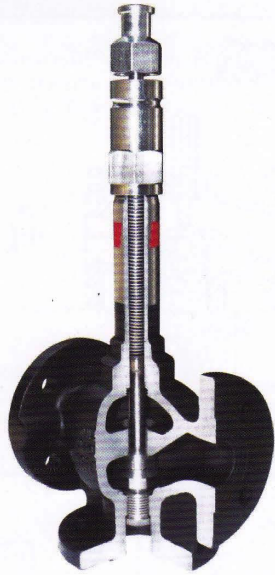


■ 控制閥 (調節閥) 之公稱直徑 (DN), 流量值 (Kvs) 及詳細尺寸表


Control Valve (control valve) in nominal diameter (DN), flow rate (Kvs) and detailed size table

口徑 Caliber	DN (mm) in (寸)	25	32	40	50	65	80
流量值 KVS (m ³ /h) Flow value of KVS (m ³ /h)		9	16	25	36	63	105
詳細尺寸 Detailed Size (mm)	L	160	180	200	230	290	310
	h1	230	282	280	276	270	270
	h2	114	130	135	147	159	166
	h3	84	100	105	115	125	130
	D	115	140	150	165	185	200
	φK	85	100	110	125	145	160
	G(PN16/25)	4*14	4*18	4*18	4*18	4*18	8*18

傳動器尺寸圖 (單位: mm) Transmission Size Chart(Units:mm)

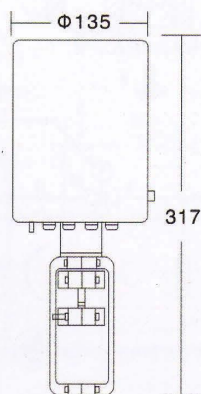

電動執行器 baelz-E07
Electric Actuator baelz-E07

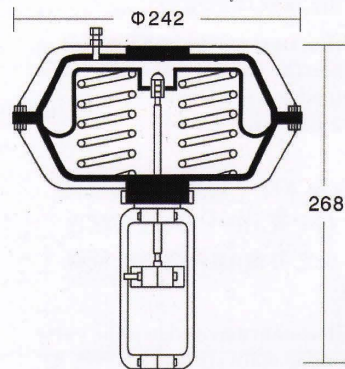

氣動執行器 baelz-P21
Pneumatic Actuator baelz-P21