

**KIT210-G : Gauge Pressure Transmitter****KIT210-A : Absolute Pressure Transmitter**

The pressure transmitter KIT210-G/210-A is suitable to measure liquid, gas, or steam flow as well as liquid level, density and pressure. KIT210-G/210-A outputs a 4 to 20 mA DC signal corresponding to the measured pressure. The key features include quick response, remote set-up using communications, self-diagnostics and optional status output for pressure high/low alarm.

**STANDARD SPECIFICATIONS****1 PERFORMANCE SPECIFICATIONS**

Reference Accuracy of Calibrated Span (includes terminal-based linearity, hysteresis, and repeatability)  $\pm 0.075\%$ ;

If  $TD > 10$  ( $TD = URL/SPAN$ ):  $\pm(0.0075 \times TD)\%$

**Ambient Temperature Effects**

Span Code	-20°C~65°C Every 10°C is $\pm 0.08\% \times \text{Span}$ (TD=1)
B/L	$\pm(0.20 \times TD + 0.10)\% \times \text{Span}$
Others	$\pm(0.15 \times TD + 0.05)\% \times \text{Span}$
Span Code	-40°C~-20°C & 65°C~85°C
B/L	$\pm(0.40 \times TD + 0.20)\% \times \text{Span}$
Others	$\pm(0.30 \times TD + 0.10)\% \times \text{Span}$

**Overpressure Effects**

$\pm 0.075\% \times \text{Span}$

**Stability**

Span Code	Stability
B/L	$\pm 0.20\% \times \text{Span} / 2\text{year}$
Others	$\pm 0.15\% \times \text{Span} / 2\text{year}$

**Power Supply Effects:**

$\pm 0.001\% / 10V$  (12~42V DC)

**2 FUNCTIONAL SPECIFICATIONS****Span and Range Limits (KIT210-G)**

Span/Range Limits		kPa	bar
B	Span	0.6~6	6~60mbar
	Range Limits	-6~6	-60~60mbar
C	Span	2~40	0.02~0.4
	Range Limits	-40~40	-0.4~0.4
D	Span	2.5~250	0.025~2.5
	Range Limits	-100~250	-1~2.5
F	Span	30~3000	0.3~30
	Range Limits	-100~3000	-1~30
G	Span	0.1~10MPa	1~100
	Range Limits	-0.1~10MPa	-1~100
H	Span	0.21~21 MPa	2.1~210
	Range Limits	-0.1~21 MPa	-1~210
I	Span	0.4~40 MPa	4~400
	Range Limits	-0.1~40 MPa	-1~400
J	Span	0.6~60 MPa	6~600
	Range Limits	-0.1~60 MPa	-1~600

**Span and Range Limits (KIT210-A)**

Span/Range Limits		kPa	bar
L	Span	2~40	0.02~0.4
	Range Limits	0~40	0~0.4
M	Span	2.5~250	0.025~2.5
	Range Limits	0~250	0~2.5
O	Span	30~3000	0.3~30
	Range Limits	0~3000	0~30

**External Zero Adjustment**

External zero is continuously adjustable with 0.01% incremental resolution of span. Re-range can be done locally using the range setting switch.

**Mounting Position Effects**

Rotation in diaphragm plane has no effect. Tilting up to 90 degree will cause zero shift up to 0.25 kPa which can be corrected by the zero adjustment.

**Output**

Two wire 4 to 20 mA DC output with digital communications, linear or square root programmable. HART FSK protocol is option superimposed on the 4 to 20 mA signal. Output range: 3.9 mA to 20.5 mA

**Failure Alarm (the mode can be selected)**

Low Mode (min): 3.7 mA, High Mode (max): 21 mA  
No Mode (hold): Keep the effective value before fault.  
The standard setting of failure alarm is High Mode.

**Response Time**

The amplifier damping constant is 0.1 sec; The sensor damping constant is 0.1~1.6 sec, it depends on the range and range compression ratio. Amplifier damping time constant is adjustable from 0 to 60 sec by software and added to response time.

**Up Time < 15s**

**Ambient Temperature Limits:** -40 to 85°C  
-20 to 65°C with LCD display or fluorine rubber sealing

**Storage and Transportation Temperature Limits**

-50 to 85°C, -40 to 85°C with LCD display

**Working Pressure Limits (Silicone oil)**

From vacuum to upper range limits

**Overload Pressure Limits**

Span	6kPa (B)	40kPa (C)	250kPa (D/M)	3MPa (F/O)
OPL	0.2MPa	1MPa	4MPa	16MPa
Span	10MPa (G)	21MPa (H)	40MPa (I)	60MPa (J)
OPL	20MPa	50MPa	50MPa	70MPa

**EMC (EMI, EMS) Conformity Standards**

EN 61326-1:2013, EN 61326-2-3:2013

KN 61000-6-1, KN 61000-6-3

**3 INSTALL****Supply & Load Requirements**

24 V DC supply,  $R \leq (U_s - 12V) / I_{max}$  kΩ,  $I_{max} = 23$  mA.  
Maximum voltage limited: 42VDC, Minimum voltage limited: 12VDC, 15VDC (with LCD display)  
230Ω to 600Ω for digital communication

**Electrical Connection**

The electrical connection is made via cable entry 1/2-14NPT. The screw terminals are suitable for wire cross-sections up to 2.5mm<sup>2</sup>.

**Process Connection**

Default Process Connection: 1/2-NPT female thread.

**4 PHYSICAL SPECIFICATIONS**

**Isolating Diaphragm:** 316L stainless steel  
Hastelloy C / Tantalum

**Process Connector:** 316 stainless steel

**Fill fluid:** Silicone oil / Fluorinated oil

**Amplifier Housing:** Aluminum with epoxy resin coat

**Housing Gasket:** Perbunan (NBR) / Silicone

**Name plate and tag:** 304 stainless steel


**Weight:** 1.6kg

**Enclosure:** Ex d IIC T6 / IP67


**DIMENSIONS**

Unit : mm


**Horizontal Impulse Piping Type**

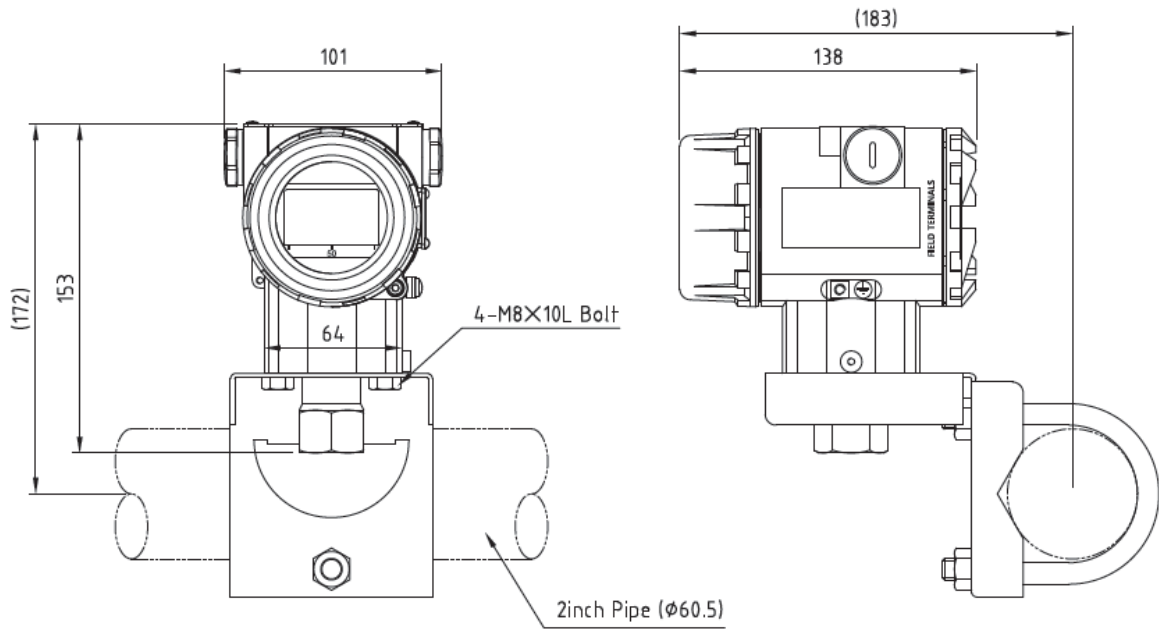

**Vertical Impulse Piping Type**

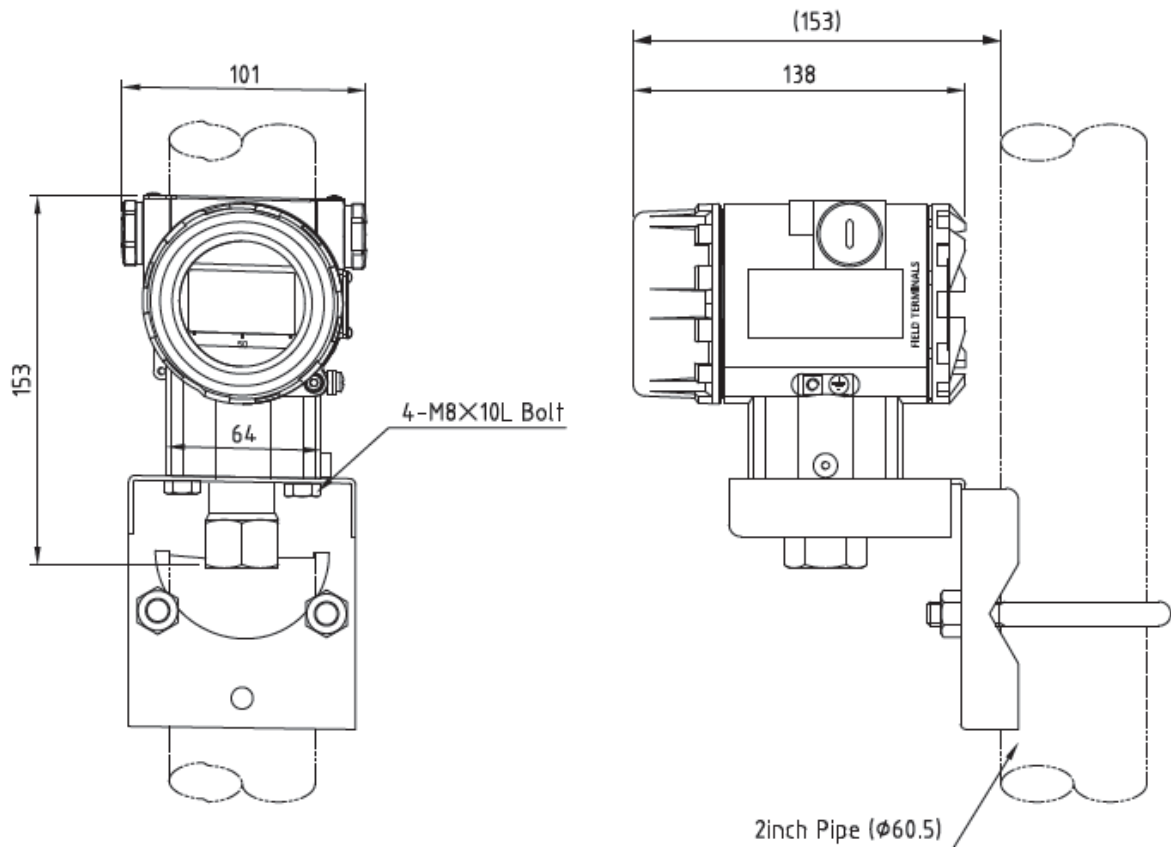

### 5 Terminal Configuration

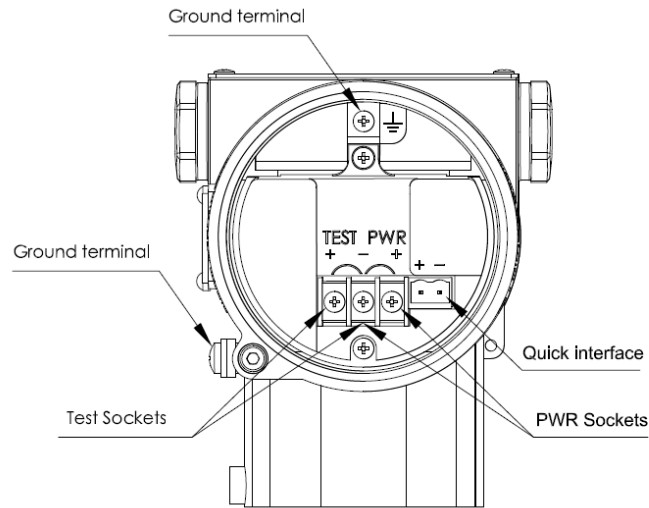



Note: Quick interface functionally equivalent to the signal terminal

### 6 Process connections Description

#### 6.1 Default Process Connection (Code 1)

**M/D/F/G/H/I/J/O Span**

**B/C/L Span**

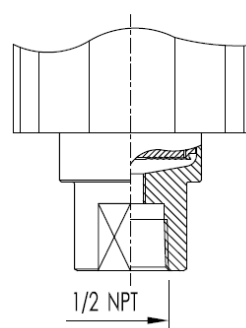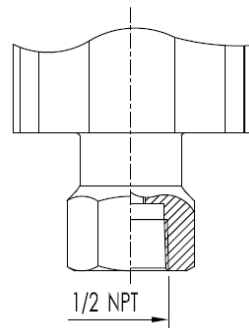

## 7 Model and suffix codes

Gauge Pressure Transmitter KIT210-G			
Absolute Pressure Transmitter KIT210-A			
10	Output		
	H	4-20mA with HART ( $\pm 0.075\%$ of Span)	
20	Span <sup>[1]</sup>		
		Gauge Pressure KIT210-GH	
	B	0-0.6kPa~6kPa / (0-60~600 mmH <sub>2</sub> O) / (0-6~60mbar)	
	C	0-2kPa~40kPa / (0-200~4000 mmH <sub>2</sub> O) / (0-20~400mbar)	
	D	0-2.5kPa~250kPa / (0-0.25~25 mH <sub>2</sub> O) / (0-25~2500mbar)	
	F	0-30kPa~3MPa / (0-3~300 mH <sub>2</sub> O) / (0-0.3~30bar)	
	G	0-0.1MPa~10MPa / (0-1~100bar)	
	H	0-0.21MPa~21MPa / (0-2.1~210 bar)	
	I	0-0.4MPa~40MPa / (0-4~400 bar)	
	J	0-0.6MPa~60MPa / (0-6~600 bar)	
		Absolute Pressure KIT210-AH	
	L	0-2kPa~40kPa / (0-200~4000 mmH <sub>2</sub> O) / (0-20~400mbar)	
	M	0-2.5kPa~250kPa / (0-25~2500mbar)	
	O	0-30kPa~3MPa / (0-0.3~30bar)	
30	Diaphragm fill fluid		
		A	316L stainless steel      Silicone oil
		B	316L stainless steel      Fluorinated oil
		C	Hastelloy C                  Silicone oil
		D	Hastelloy C                  Fluorinated oil
		E	Tantalum                      Silicone oil
		F	Tantalum                      Fluorinated oil
40	Process connection		
		1	1/2-NPT female thread (Std.)
		2	Other (with adapter)
50	Special function		
		N	None (line to line : 500V / line to ground : 1kV)
		P	Anti-lightning function (line to line : 1kV / line to ground : 2kV)
		O	Degrease cleansing treatment (Oxygen measurement must be with fluorinated oil filled capsule, Viton (FKM) gasket, <6MPa ,<60℃)
60	Mounting bracket		
		N	None
		1	304 stainless steel
70	Integral indicator		
		N	None
		1	LCD display
		2	Backlight LCD display

## KIT210 Series - Pressure Transmitter

## General Specifications

80	Electrical connection									
									1	1/2-14NPT
									2	Other (with adapter)
90	Hazardous area certifications									
									W	Weatherproof (IP67)
									K	KOSHA Flameproof

Note 1: KIT210-G corresponding to select gauge pressure range code, KIT210-A corresponding to select absolute pressure range code;

Order example:

**For example: KIT210-GHCA1N121W**

[KIT210-G]: Gauge pressure transmitter

[H]: 4-20mA with HART

[C]: Span:0-2kPa~40kPa / (0-200~4000 mmH<sub>2</sub>O) / (0-20~400mbar)

[A]: 316L stainless steel diaphragm, Silicone oil fill fluid

[1]: 1/2-NPT female thread process connector

[N]: None

[1]: With 304 stainless steel mounting bracket

[2]: With Backlight LCD display

[1]: 1/2-14NPT

[W]: Weatherproof (IP67)