



LED隔离柱

LED固定座

导光柱及罩盖

名称：LED 导光柱、LED 垂直导光柱 VLP

材料：聚碳酸酯

颜色：透明色


阻燃等级：UL94 V0

材料厚度：0.8-3mm

包装：1000 pcs / 包

产品库存：5000000 PCS

用途：用于 S.M.T LED 导光于机壳面板上，使光度均匀、柔和。

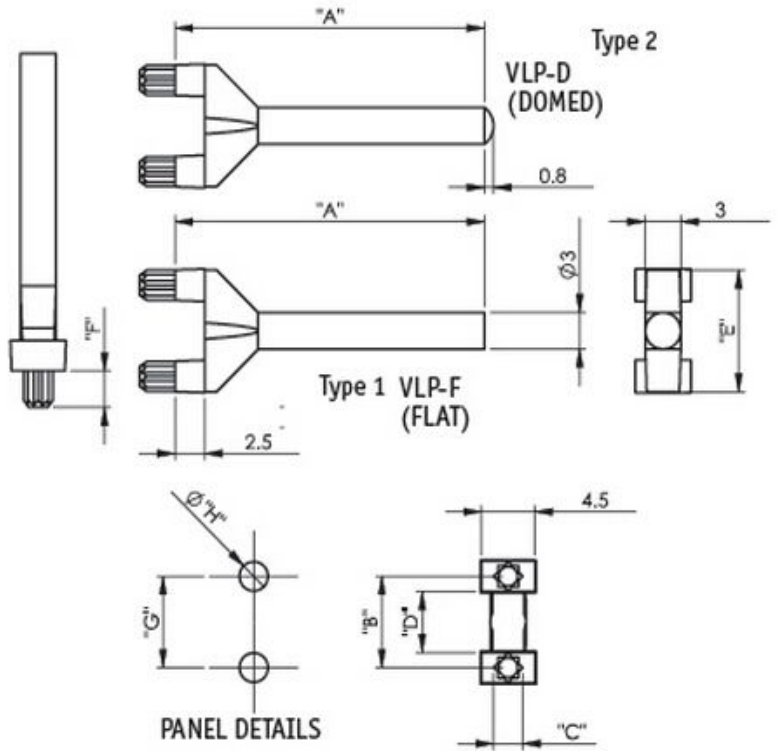

产品编号.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm) +/- 0.05
VLP1-F-1	12.7	4.7	1.5	3	6.4	2.5	4.7	1.5
VLP1-F-2	16.5	4.7	1.5	3	6.4	2.5	4.7	1.5
VLP1-F-3	21.8	4.7	1.5	3	6.4	2.5	4.7	1.5
VLP1-F-4	26.1	4.7	1.5	3	6.4	2.5	4.7	1.5

产品编号.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm) +/- 0.05
VLP2-F-1	12.7	7.5	2.45	5	10	3	7.5	2.4
VLP2-F-2	15	7.5	2.45	5	10	3	7.5	2.4
VLP2-F-3	16.5	7.5	2.45	5	10	3	7.5	2.4
VLP2-F-4	21.8	7.5	2.45	5	10	3	7.5	2.4
VLP2-F-5	26.1	7.5	2.45	5	10	3	7.5	2.4
VLP2-F-6	55	7.5	2.45	5	10	3	7.5	2.4
VLP1-D-1	12.7	4.7	1.5	3	6.4	2.5	4.7	1.5
VLP1-D-3	16.5	4.7	1.5	3	6.4	2.5	4.7	1.5
VLP1-D-4	21.8	4.7	1.5	3	6.4	2.5	4.7	1.5
VLP1-D-5	26.1	4.7	1.5	3	6.4	2.5	4.7	1.5
VLP2-D-1	12.7	7.5	2.45	5	10	3	7.5	2.4
VLP2-D-3	16.5	7.5	2.45	5	10	3	7.5	2.4
VLP2-D-4	21.8	7.5	2.45	5	10	3	7.5	2.4
VLP2-D-5	26.1	7.5	2.45	5	10	3	7.5	2.4
VLP2-D-6	55	7.5	2.45	5	10	3	7.5	2.4

RICHCO 聚碳酸酯 LED 导光柱透明色 UL94 V0



